Blueair by BLUENIX

## MODEL BSF23-HC

# BOTTOM MOUNT REACH-IN FREEZER

Sleek and durable cooling solution for your food and beverages.



Intertek Intertek
Conforms to NSF/ANSI 7(ETL)

ENERGY STAR

Natural REFRIGERANT

**Stainless steel cabinet construction**
Stainless steel interior and exterior (galvanized steel back & bottom).

**Temperature range between -10°F ~ 5°F**
Air guard on rear wall ensures proper air circulation and cooling.

**Hydrocarbon refrigerants (R-290)**
increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.

**Visual and audible door open alarm**
Alarm sounds when doors are not completely closed to protect against food spoilage

5 YEAR WARRANTY PARTS & LABOR

7 YEAR WARRANTY COMPRESSORS


## Cabinet construction

- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- Epoxy coated wire shelves with adjustable shelving height.
- 4 shelves per compartment.
- Four 4" Diameter swivel casters with front brakes standard.


## Refrigeration


- Self-contained system, bottom mounted compressor. Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Bottom mounted condensation pan.
- Designed to prevent water overflow and increase ventilation.
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.

Front view

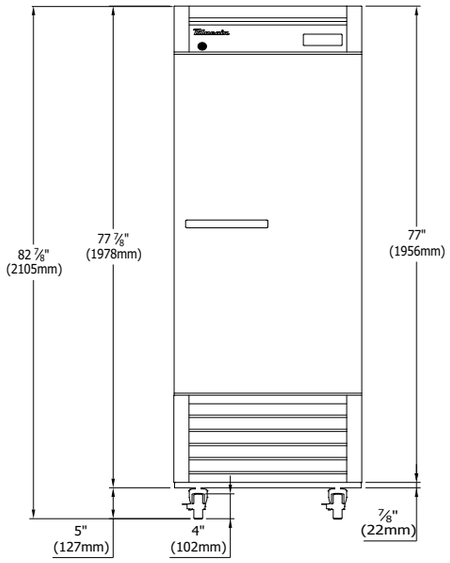


Side view

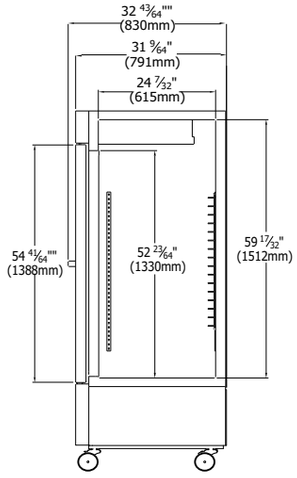


Top view

# MODEL BSF23-HC

**BOTTOM MOUNT REACH-IN FREEZER**

| Exterior Dimensions (inches/mm) | | |
|---|---|---|
| L | D | H |
| 26 13/16" 681mm | 31 9/64" 791mm | 82 7/8" 2105mm |

| Weight (lbs/kg) | |
|---|---|
| Net Weight | Ship Weight |
| 251 lbs 114 kg | 282 lbs 128 kg |

## Doors

- Self-closing doors (doors close at 90° or less)
- Automatic hold open door feature at 110°.
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)
- Door designed to open easily.
- Doors built with pressure relievers to eliminate vacuum pressure and allow easy door opening.
- Standard door locks.

## Design & Features

- Self-diagnostic digital temperature control & monitor system.
- Digital display allows for easy monitoring.
- Digital controls include manual defrost for easy maintenance.
- Rounded corner design gives a stylish appearance and reduces chances of injury.

## Optional Features & Accessories

- 2.5" diameter casters available.
- 6" adjustable legs available.
- Additional shelves are available.
- Left hinged door available.

| | |
|---|---|
| Doors | 1 |
| Capacity Cu.Ft. | 23 |
| Shelves | 4 |
| Refrigerant | R-290 |
| Temperature Range | -10°F ~ 5°F |
| Easy Maintenance | Sliding Condensing Unit |
| Connection | 9.8 ft long (3m) flexible three wire cord with modeled plug |
| Lighting | LED Interior lighting |
| HP | 1/2 |
| Voltage | 115V/60Hz |
| Amps | 5.6 |
| NEMA Config. | NEMA 5-15 |

Blueair by BLUENIX

Blue Air has right to change specifications without further notice.

blueairfse.com
orders@blueairfse.com
1-886-677-8500

223 W. Rosecrans Ave., CA 90248
T: 310-808-0102

9 W. Shelton Terrace #A, Hillside, NJ 07205
T: 908-688-0970