Bluenix by BLUENIX

MODEL BAPP44-D2-HC

PIZZA PREP TABLES



Stainless steel cabinet construction
Stainless steel interior and exterior (galvanized steel back & bottom).

Temperature range between 33°F ~ 39°F
Air guard on rear wall ensures proper air circulation and cooling.

Hydrocarbon refrigerants (R-290)
Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.

5 YEAR WARRANTY PARTS & LABOR

7 YEAR WARRANTY COMPRESSORS

c UL us LISTED Intertek
Conforms to NSF/ANSI 7(ETL)

Natural REFRIGERANT

Exterior Dimensions (inches/mm)		
L	D	H
44 3/8″ 1128 mm	32 3/4″ 831 mm	37″ 939 mm

Weight (lbs/kg)	
Net Weight	Ship Weight
309 lbs 140 kg	326 lbs 147 kg

* Depth does not include 3 3/4″ for cutting board
* Height does not include 5" (127 mm) for casters


Cabinet construction

- High density foamed in place polyurethane insulation – Environmentally safe.
- Drop-in section : Fans force cold air into this enclosed area keeping stred food items consistently cold
- Insulated pan cover with a stainless steel divider which prevents food spillage into the storage area beneath
- Unit accommodates standard 4″ or 6″ deep pans (pans are not included)
- Epoxy coated wire shelves with adjustable shelving height.
- Side rail cutting board bracket with 19″ deep, 1/2″ thick cutting board included
- Four (4) 4″ diameter swivel casters with front brakes standard.


Refrigeration

- Front breathing, side mounted compressor unit.
- Compressor configuration allows unit to be efficient in narrow spaces and be serviced without being moved.
- Epoxy coated evaporator reduces potential corrosion
- Refrigerators have a temperature range between 33°F ~ 39°F


Front view

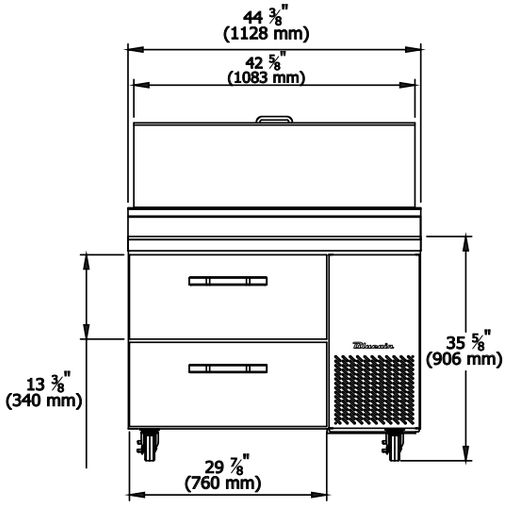

Side view

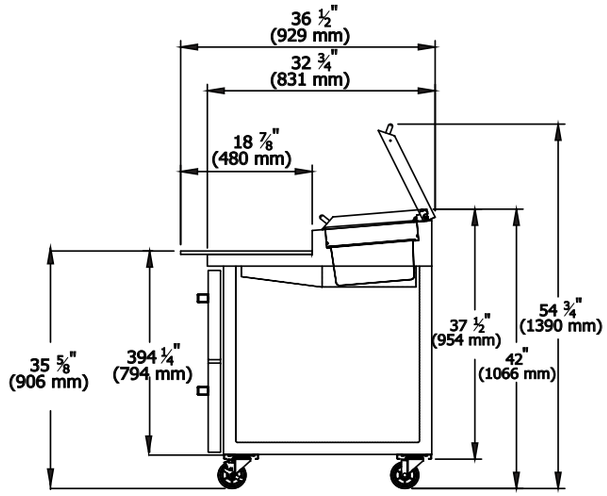

Top view

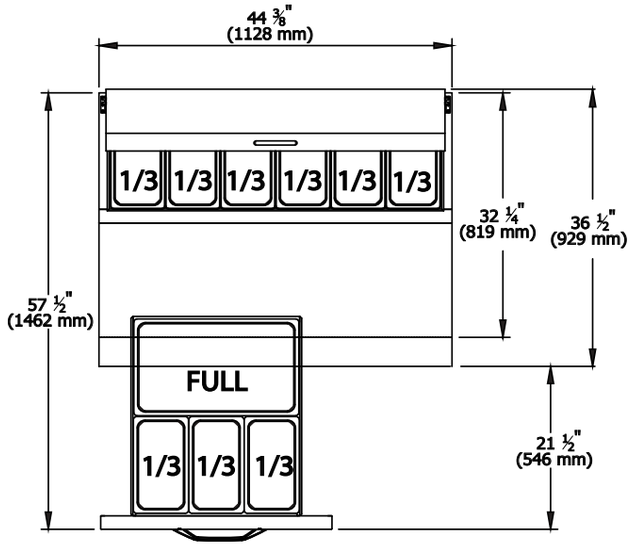

- This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.
- Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.

Doors

- Self-closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)
- Door designed to open easily.

Optional Features & Accessories

- 2.5" diameter casters available
- 6" adjustable legs available.
- Additional shelves are available.

Drawer	2
Capacity Cu.Ft.	11.3
Shelves	N/A
Refrigerant	R-290
Temperature Range	33°F ~ 39°F
Easy Maintenance	Sliding Condensing Unit
Connection	9.8 ft long (3m) flexible three wire cord with modeled plug
HP	3/8
Voltage	115V/60Hz
Amps	3.5
NEMA Config.	NEMA 5-15

Blueair by BLUENIX

Blue Air has right to change specifications without further notice.

blueairfse.com

orders@blueairfse.com

223 W. Rosecrans Ave., CA 90248
T: 310-808-0102

9 W. Shelton Terrace #A, Hillside, NJ 07205
T: 470-625-0182

7025 Amwiler industrial Drive, Suite A, Atlanta GA
T: 908-688-0970