Bluenix by BLUENIX

MODEL BAPP93-D4LR-HC

PIZZA PREP TABLES

Stainless steel cabinet construction
Stainless steel interior and exterior (galvanized steel back & bottom).

Temperature range between 33°F ~ 39°F
Air guard on rear wall ensures proper air circulation and cooling.

Hydrocarbon refrigerants (R-290)
Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.

5 YEAR WARRANTY PARTS & LABOR

7 YEAR WARRANTY COMPRESSORS

c UL us LISTED Intertek
Conforms to NSF/ANSI 7(ETL)

Natural REFRIGERANT

Exterior Dimensions (inches/mm)		
L	D	H
93 1/4″ 2370 mm	32 3/4″ 831 mm	37″ 939 mm

Weight (lbs/kg)	
Net Weight	Ship Weight
496 lbs 224 kg	536 lbs 243 kg

* Depth does not include 3 3/4″ for cutting board
* Height does not include 5" (127 mm) for casters

Cabinet construction

- High density foamed in place polyurethane insulation – Environmentally safe.
- Drop-in section : Fans force cold air into this enclosed area keeping stred food items consistently cold
- Insulated pan cover with a stainless steel divider which prevents food spillage into the storage area beneath
- Unit accommodates standard 4″ or 6″ deep pans (pans are not included)
- Epoxy coated wire shelves with adjustable shelving height.
- Side rail cutting board bracket with 19″ deep, 1/2″ thick cutting board included
- Six (6) 4″ diameter swivel casters with front brakes standard.

Refrigeration

- Front breathing, side mounted compressor unit.
- Compressor configuration allows unit to be efficient in narrow spaces and be serviced without being moved.
- Epoxy coated evaporator reduces potential corrosion
- Refrigerators have a temperature range between 33°F ~ 39°F

Front view

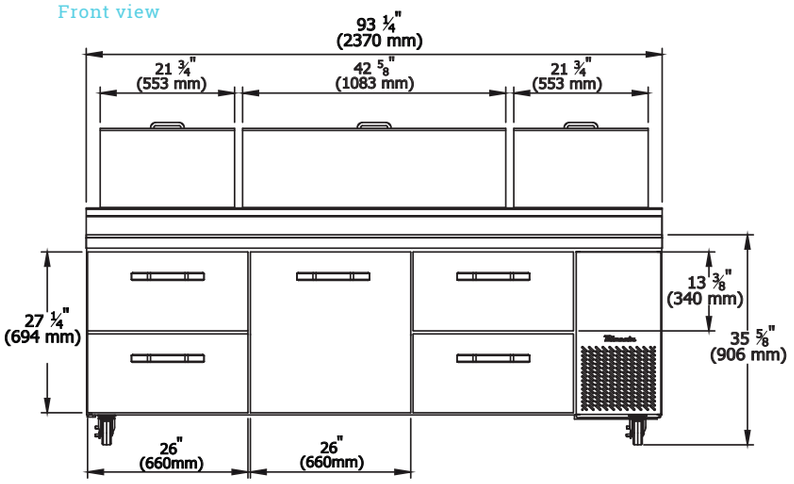

Side view

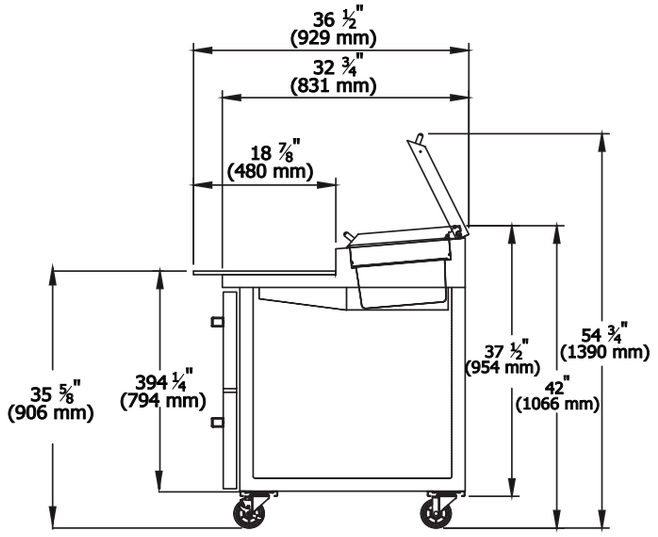

Top view

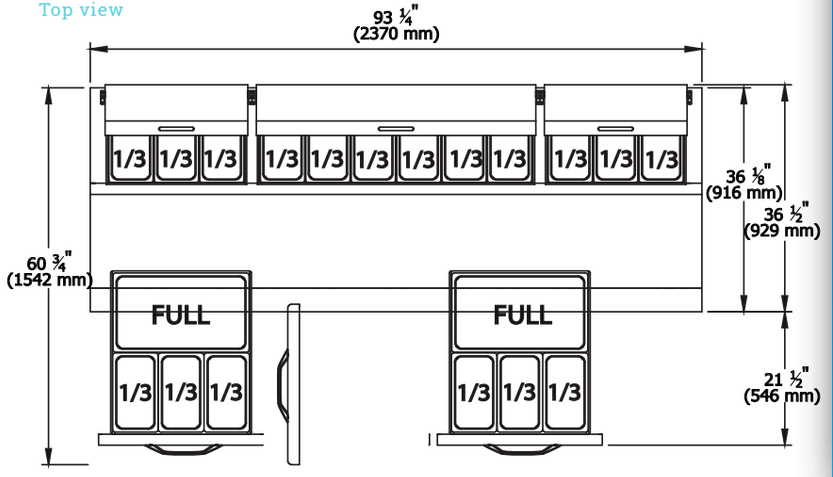

Doors

- Self-closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)
- Door designed to open easily.

Optional Features & Accessories

- 2.5" diameter casters available
- 6" adjustable legs available.
- Additional shelves are available.

Door	1
Drawer	4
Capacity Cu.Ft.	30.8
Shelves	2
Refrigerant	R-290
Temperature Range	33°F ~ 39°F
Easy Maintenance	Sliding Condensing Unit
Connection	9.8 ft long (3m) flexible three wire cord with modeled plug
HP	3/8
Voltage	115V/60Hz
Amps	3.5
NEMA Config.	NEMA 5-15

- This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.

Blueair by BLUENIX

Blue Air has right to change specifications without further notice.

blueairfse.com

orders@blueairfse.com

223 W. Rosecrans Ave., CA 90248
T: 310-808-0102

9 W. Shelton Terrace #A, Hillside, NJ 07205
T: 470-625-0182

7025 Amwiler industrial Drive, Suite A, Atlanta GA
T: 908-688-0970