CHEMICAL SANITIZING DOUBLE RACK CORNER DISHWASHER

CB

Low Temperature
Double Rack Dishwasher



FEATURES

- 80 racks / 320 covers per hour.
- Large 20-1/2" clearance for dishes.
- Economical to operate. Uses as little as .97 gallons of water per rack.
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Top mounted controls include built-in chemical pumps and deliming system that assures proper chemical usage.
- Auto start/stop makes operation safe and easy.
- Built-in Poly Pro scrap accumulator with all stainless steel drawer prevents food soil from entering drain system.
- Water inlet comes with built-in strainer, prevents debris from clogging the water valve.
- Dishmachine comes with 2 dishracks.
- Stainless steel impeller offers extended life and service.
- Stainless Steel scrap tray, long lasting.


CMA MODEL: CB



Low Chemical Alarm is an audible alarm and warning light feature that gives a warning when sanitizer product is nearly empty.



Unique pull-pin design allows wash arms to be easily removed for cleaning.



Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.

AVAILABLE OPTIONS

- Solid/Powder Dual Bowl Dispenser
- Temp-Sure heater assures a continuous supply of 140°F hot water guarantees excellent results. Requires a separate 208-240v 3 phase 40 amp power supply.
- Alternative Cycle Times
- Alternative Voltages Available
- Stainless Steel Tables
- Stainless Steel Scrap Trap in lieu of Poly Pro
- Slant Shelf 21"X42"

CMA Energy Mizer®
Registered Trademark

ENERGY STAR
Intertek 3090590
c UL us LISTED COMMERCIAL DISHWASHER 864T

CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.


© 02-2023 CMA, Inc.

CORNER DOUBLE (CB) ENERGY SAVER (extended wrapper)

Chemical Sanitizing
Double Rack
Corner Dishwasher

WARNINGS:

- Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

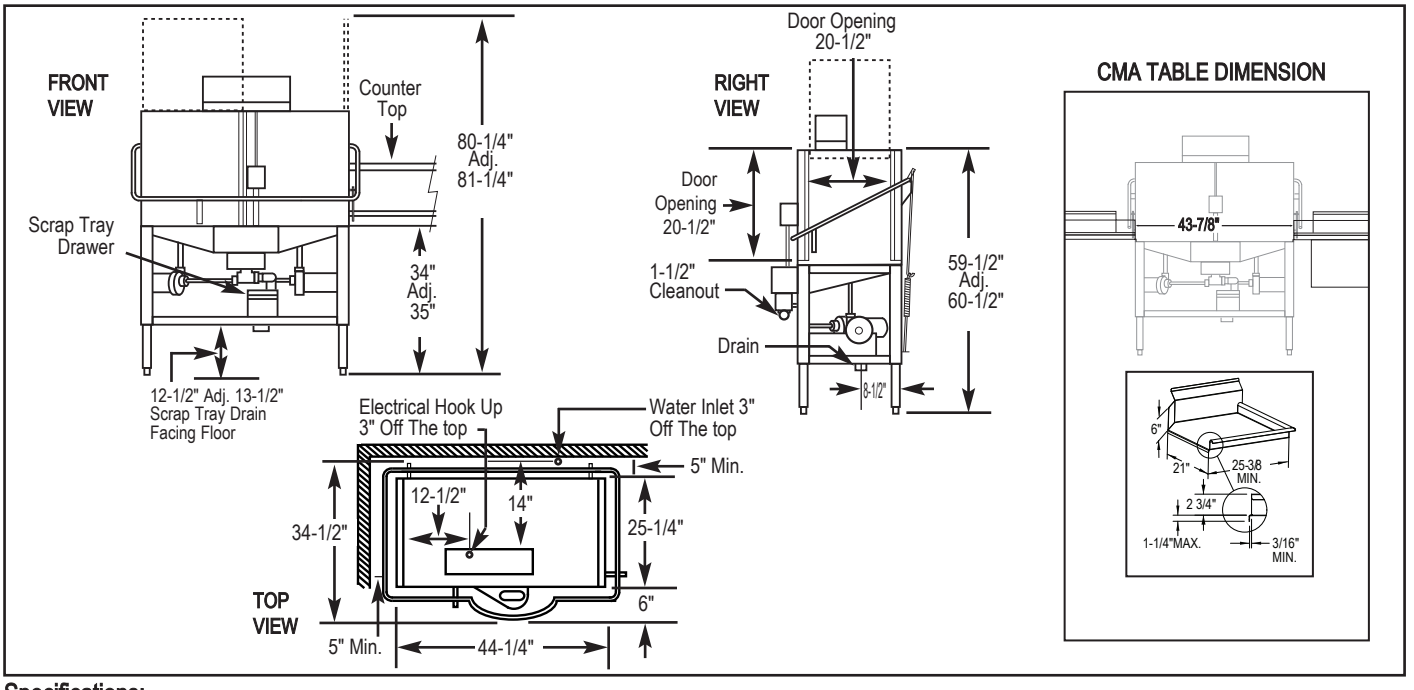

Specifications:

MODEL CB	USA	METRIC
OPERATING CAPACITY		
RACKS PER HOUR		
(NSF RATED)	80	80
OPERATING CYCLE		
WASH TIME-SEC	45	45
RINSE TIME-SEC	30	30
DWELL TIME-SEC	15	15
TOTAL CYCLE TIME	90	90
WASH TANK CAPACITY	1.94 GAL.	(7.34 L)
PUMP CAPACITY	104 GPM (2 Pumps)	(394 LPM)
OPERATING TEMPERATURE		
REQUIRED	120°F	(49°C)
RECOMMENDED	140°F	(60°C)
WATER CONSUMPTION		
PER RACK	.97 GAL.	(3.67 L)
PER HOUR	77.6 GPH	(293.7LPH)
WATER REQUIREMENTS		
WATER INLET	3/4"	-
DRAIN-I.P.S.	2"	-

	USA	METRIC
WASH PUMP MOTORS HP (2)	1	1
DIMENSIONS		
DEPTH	25-1/4"	(64cm)
WIDTH	44-1/4"	(112cm)
HEIGHT	59-1/2"-60-1/2"	(151.1-153.7cm)
STANDARD TABLE HEIGHT	34"	(86cm)
MAXIMUM CLEARANCE FOR DISHES	20"	(43cm)
STANDARD DISHRACK	2	2
DIMENSIONS	20" x 20"	(50.8 x 50.8cm)
ELECTRICAL RATING	**VOLTS**	**AMPS**
	115	22
APPROXIMATE SHIPPING WEIGHT	361#	(163kg)
SHIPPING DIMENSIONS	PALLET & BOX @ 41" X 56" X 70"	

Summary Specifications: Model CB

CMA Energy Mizer model CB low temperature, chemical sanitizing commercial dishwasher meets UL and ETL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model CB is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4" x 19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms. The model CB incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle. **Note: This machine does not have built-in heaters, therefore pro-duces no steam.**

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.

Intertek 3090590 · c UL us LISTED COMMERCIAL DISHWASHER 864T · ENERGY STAR

CMA Energy Mizer® Registered Trademark

CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841• 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

© 02-2023 CMA, Inc.

an Ali Group Company

The Spirit of Excellence