

# Cube Undercounter Ice Machine

Model No.

**SWUC-120H****HALF CUBE**

**SWUC-120H**

## ➤ Features:

- Produces up to 120 lb of cube ice per 24 hours
- Built-in storage bin holds approximately 40 lb of ice
- Compact undercounter design ideal for bars, restaurants, and cafes
- Air-cooled refrigeration system for efficient performance and easier installation
- Uses R290 eco-friendly refrigerant
- Stainless steel exterior cabinet for durability and easy cleaning
- Front intake and exhaust allow flexible undercounter installation
- Integrated electronic controls with status indicators
- Smart LED lighting with remote included
- Automatic ice-making cycle with bin-full shutoff
- Includes scoop and internal ice baffle for easier serving
- Adjustable front leveling legs for quick setup on uneven floors
- Service-friendly layout for easier access to condenser and components



## ➤ Warranty Info:

### Three Year

- Parts & Labor on entire unit.
- Valid in United States.
- Valid for commercial use only.



### Five Year

- Compressor & Evaporator, Part Only.




Conforms to UL Standard 471 and NSF Standard 7  
 Certified to CSA Standard C22.2 No. 120

Revised


01/01/2026

**SWUC-120H**
Phone: (800).768.5953  
Fax: (800).976.1299


**www.servware.com**  
 Copyright © 2026 Serv-Ware Products LLC.

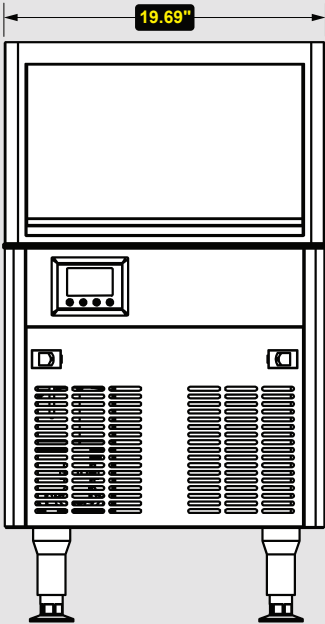

Front View

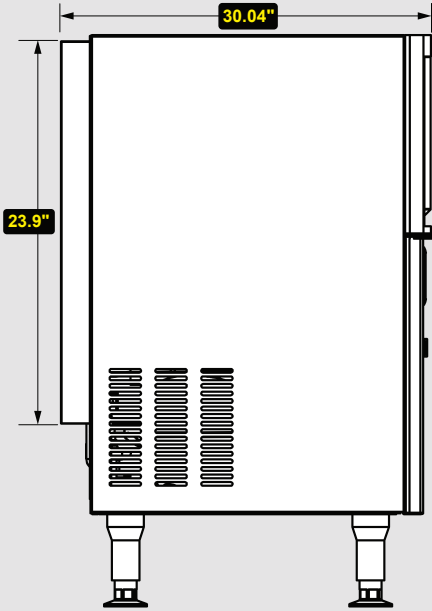

Side View

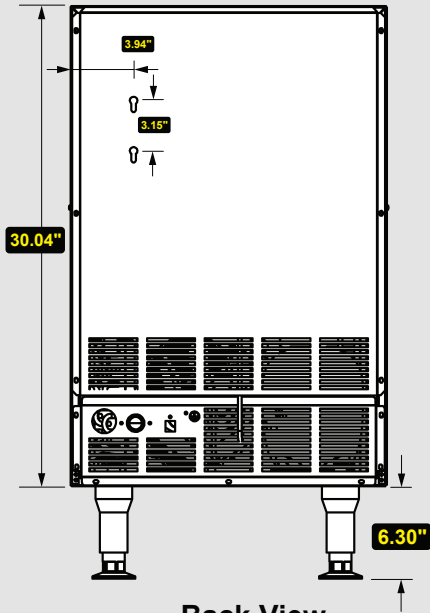

Back View



NEMA 5-15P


➤Technical Information:

| MODEL #   | DESCRIPTION                     | DIMENSIONS                     | WEIGHT/LBS. |
|-----------|---------------------------------|--------------------------------|-------------|
|           |                                 | ( W x D x H )                  | (Shipping)  |
| SWUC-120H | 120 lb Undercounter - Half Cube | 19.69" W x 30.04" D x 36.34" H | 110 lbs.    |

| COOLING           |                     | ICE PRODUCTION   |         |
|-------------------|---------------------|------------------|---------|
| Temperature Range | 23°F – 26°F         | Bin Capacity     | 40 lb.  |
| Refrigerant       | R290                | Output (lb/24hr) | 120 lb. |
| BTU/H             | 1,365               |                  |         |
| Defrosting        | Automatic Operation |                  |         |
| HP                | 1/3                 |                  |         |

| CONSTRUCTION        |                               |
|---------------------|-------------------------------|
| Exterior Material   | Stainless Steel               |
| Interior Material   | Food-Grade Polyethylene       |
| Insulation Material | Rigid Polyurethane Foam       |
| Structure Build     | Reinforced Heavy Duty Cabinet |

| ELECTRICAL |     |
|------------|-----|
| Voltage    | 115 |
| Watts      | 400 |
| Hz         | 60  |
| Phase      | 1   |



Phone:(800).768.5953  
Fax:(800).976.1299