OPEN TOP PREP. TABLE
BACK MOUNTED CONDENSING UNIT

EOTP3 — EOTP Series

3 YEARS PARTS & LABOR
5 YEARS ELECTRICAL
10 YEARS COMPRESSOR
WARRANTY



Refrigeration System
· Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
· Front air breathing for flexibility in installation.
· Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
· Full-length air duct ensures optimal cold air circulation.
· Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
· Large capacity, corrosion-resistant condenser and evaporator coils.
· Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
· High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
· Pressure relief devices allow rapid cabinet re-entry.
· Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction
· Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
· Open spaced interior with no walls between cabinet compartments.
· Vented stainless steel panel between top pan area and cabinet catches food debris.
· 16 gauge, high quality stainless steel worktop and top lids.
· Galvanized steel bottom.
· 2.5" thick high density polyurethane insulation.
· Four 5" swivel casters with locks on front set.

Doors
· Heavy duty stainless steel interior / exterior.
· 2.5" thick high density polyurethane insulation.
· Frame heaters prevent exterior moisture build up.
· Self-closing with adjustable torsion system for a positive seal.
· Snap-in magnetic door gasket make cleaning and replacement an easy process.
· High strength, recessed door handles.

Preparation Area
· Mega-top fits three rows of NSF certified polycarbonate 6" deep pans with lids (see table for size and quantity).
· Removable 1/2" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.

Shelving
· One epoxy coated, steel wire shelf per section.
· Height adjustable stainless steel clips.

Temperature Control
· Multi-function digital controller with easy to read LED display.
· Factory preset temperature, 35ºF. Temperature setting range from 33ºF to 54ºF.
· Audible overheat protection alarm for compressor and condenser coil.

Options
· 9 1/8" deep, removable cutting board.
· NSF certified stainless steel double overshelf.
· Additional shelving.
· 3" swivel casters with locks.
· 3.5" – 6" height-adjustable and interchangeable legs.
· Sneeze guard and tray slide

Type	Doors	Capacity Cu. Ft.	# of Pans	Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Crated Weight	Exterior Dimensions		
										L	D	H*
REF	3	19	-	3	R-290	1/3	115-60-1	3	424 lbs	71.125"	31.5"	32.75"

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (※) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

OPEN TOP PREP. TABLE
BACK MOUNTED CONDENSING UNIT

EOTP3 — EOTP Series

DIMENSIONAL DATA

External Dims.	L	71.125 in.
	D	31.5 in.
	H*	32.75 in.
Crated Weight		424 lbs.
Doors/Drawers/Lids		3
Max Weight Support		-

STORAGE DATA

Net Capacity Cu. Ft. ⚑	19
Shelves	3
Barrels	-
20 oz. Bottles	-
12 oz. Bottles	-
12 oz. Cans	-
8" Mugs	-
# of Pans (Top)	1/6x30
# of Pans (Drawer)	-
Dividers	-
Trays	-

ELECTRICAL DATA

Voltage	115-60-1
Full Load Amperage	3A
Feed Wires w/ Ground	3
Cord Length	9ft
NEMA Plug Type	NEMA 5-15P

REFRIGERATION DATA


Compressor	Back
Refrigerant	R-290
Compressor HP	1/3
BTU/HR†	N/A

KEY


D	Door	**R**	Refrigerator
L	Lid	**REF**	Refrigerator
H	Half Door	**F**	Freezer
FD	Full Door	**FRZ**	Freezer
SD	Solid Door	**DUAL**	REF/FRZ Combo
GD	Glass Door	**DR**	Drawer

	Elevation	Right	Plan	3D	Back
KCL					


PLAN VIEW

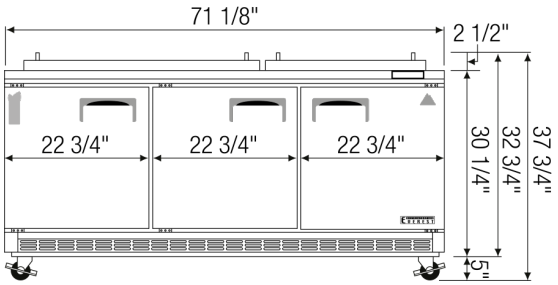

FRONT

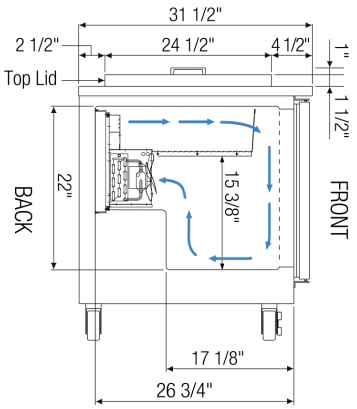

SIDE

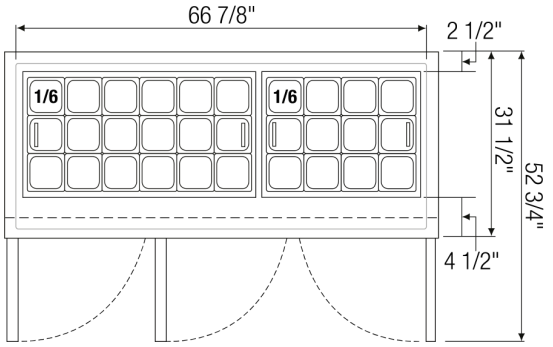

TOP

ACCESSORIES & OPTIONS

☐	Additional Shelving	- Contact Everest Refrigeration for more information.
☐	AJL03-00	- Interchangeable Leg for Caster (Optional)
☐	CASA3-01	- 3" Overall Height Caster Assembly - (2) Front (2) Rear
☐	OS24-00	- Double overshelf (71" L x 13.5" D x 48" H). Adds 31" of height to unit.
☐	PCT12-00	- Cutting Board, (71" x 9-1/8") For EPBR3, EOTP3
☐	SG72	- Sneeze Guard 72" for EOTP3
☐	TS72	- Tray Slide 72" for EOTP3

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (⚑) Product capacity is calculated based on standard industry figures. (✲) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

201 W. Artesia Blvd., Compton, CA 90220 T. (310) 323-6586 F. (310) 323-7524