# BACK MOUNT MEGA-TOP SANDWICH PREP. TABLE
## BACK MOUNTED CONDENSING UNIT

## EPBSR2 — EPB Series

3 YEARS PARTS & LABOR
5 YEARS ELECTRICAL
10 YEARS COMPRESSOR
WARRANTY



### Refrigeration System
· Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
· Front air breathing for flexibility in installation.
· Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
· Full-length air duct ensures optimal cold air circulation.
· Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
· Large capacity, corrosion-resistant condenser and evaporator coils.
· Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
· High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
· Pressure relief devices allow rapid cabinet re-entry.
· Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

### Cabinet Construction
· Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
· Open spaced interior with no walls between cabinet compartments.
· Vented stainless steel panel between top pan area and cabinet catches food debris.
· 16 gauge, high quality stainless steel worktop, lid and hood.
· Galvanized steel bottom and rear.
· 2.5" thick high density polyurethane insulation.
· Four 5" swivel casters with locks on front set.

### Doors
· Heavy duty stainless steel interior / exterior.
· 2.5" thick high density polyurethane insulation.
· Frame heaters prevent exterior moisture build up.
· Self-closing with adjustable torsion system for a positive seal.
· Snap-in magnetic door gasket make cleaning and replacement an easy process.
· High strength, recessed door handles.

### Preparation Area
· Mega-top fits three rows of NSF certified polycarbonate 6" deep pans (see table for size and quantity).
· 1/2" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
· 9 1/8" deep cutting board is removable for ease of cleaning.

### Shelving
· One epoxy coated, steel wire shelf per section.
· Height adjustable stainless steel clips.

### Temperature Control
· Multi-function digital controller with easy to read LED display.
· Factory preset temperature, 35ºF. Temperature setting range from 33ºF to 54ºF.
· Audible overheat protection alarm for compressor and condenser coil.

### Options
· NSF certified stainless steel double overshelf.
· Additional shelving.
· 3" swivel casters with locks.
· 3.5" – 6" height-adjustable and interchangeable legs.

| Type | Doors | Capacity Cu. Ft. | # of Pans | Shelves | Refrigerant | HP | Power V-Hz-Ph | Amps | Crated Weight | Exterior Dimensions | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | L | D | H* |
| REF | 2 | 10 | 1/6x12 | 2 | R-290 | 1/5 | 115-60-1 | 2.5 | 272 lbs | 35.625" | 35.25" | 38.5" |

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (✲) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

# BACK MOUNT MEGA-TOP SANDWICH PREP. TABLE
## BACK MOUNTED CONDENSING UNIT

**EPBSR2** | **EPB Series**

### DIMENSIONAL DATA

| | | |
|---|---|---|
| External Dims. | L | 35.625 in. |
| | D | 35.25 in. |
| | H* | 38.5 in. |
| Crated Weight | | 272 lbs. |
| Doors/Drawers/Lids | | 2 |
| Max Weight Support | | - |

### STORAGE DATA

| | |
|---|---|
| Net Capacity Cu. Ft. ⚑ | 10 |
| Shelves | 2 |
| Barrels | - |
| 20 oz. Bottles | - |
| 12 oz. Bottles | - |
| 12 oz. Cans | - |
| 8" Mugs | - |
| # of Pans (Top) | - |
| # of Pans (Drawer) | 1/6x12 |
| Dividers | - |
| Trays | - |

### ELECTRICAL DATA

| | |
|---|---|
| Voltage | 115-60-1 |
| Full Load Amperage | 2.5A |
| Feed Wires w/ Ground | 3 |
| Cord Length | 9ft |
| NEMA Plug Type | NEMA 5-15P |

### REFRIGERATION DATA


| | |
|---|---|
| Compressor | Back |
| Refrigerant | R-290 |
| Compressor HP | 1/5 |
| BTU/HR† | 1655 |

### KEY


| | | | |
|---|---|---|---|
| **D** | Door | **R** | Refrigerator |
| **L** | Lid | **REF** | Refrigerator |
| **H** | Half Door | **F** | Freezer |
| **FD** | Full Door | **FRZ** | Freezer |
| **SD** | Solid Door | **DUAL** | REF/FRZ Combo |
| **GD** | Glass Door | **DR** | Drawer |

| | Elevation | Right | Plan | 3D | Back |
|---|---|---|---|---|---|
| KCL | | | | | |


### PLAN VIEW

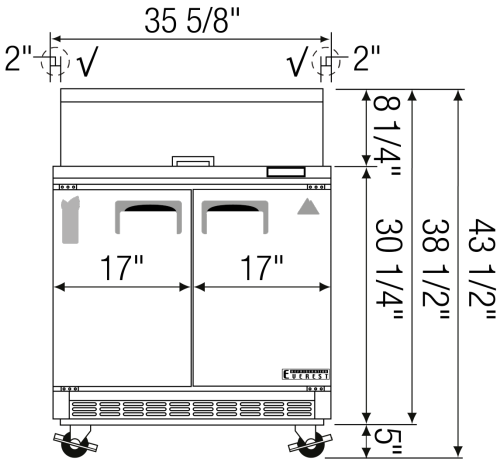


FRONT

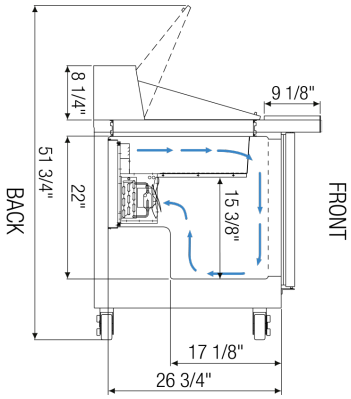


SIDE




TOP

### ACCESSORIES & OPTIONS

| | | |
|---|---|---|
| ☐ | Additional Shelving | - Contact Everest Refrigeration for more information. |
| ☐ | AJL03-00 | - Interchangeable Leg for Caster (Optional) |
| ☐ | CASA3-01 | - 3" Overall Height Caster Assembly - (2) Front (2) Rear |
| ☐ | OS21-00 | - Double overshelf (35" L x 13.5" D x 48" H). Adds 31" of height to unit. |

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (⚑) Product capacity is calculated based on standard industry figures. (✲) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.


201 W. Artesia Blvd., Compton, CA 90220 T. (310) 323-6586 F. (310) 323-7524