GLASS DOOR MERCHANDISER FREEZER
SWING DOORS

EMGF23B — EM Series





Refrigeration System
· Bottom mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
· Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
· Full-length air duct ensures optimal cold air distribution (except EMGR5(B).
· Air circulation guard keeps floor vents from obstruction (except EMGR5(B).
· Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
· Large capacity, corrosion-resistant condenser and evaporator coils.
· Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
· High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
· Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction
· Black coated steel exterior. White coated interior.
· Open spaced interior with no walls between compartments.
· Stainless steel floor interior has rounded corners and detachable drain plug for ease of cleaning.
· 2.5" thick high density polyurethane insulation.
· Four 5" swivel casters with locks on front set. Leg stabilizers standard.

Lighting
· Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors
· Low emissivity double glass panes reflect UV rays for efficient cooling.
· Matte finish aluminum door frames.
· Frame heaters prevent exterior moisture build up.
· Defroster strips keep glass planes clear and fog-free.
· Self-closing with adjustable torsion system for a positive seal.
· Snap-in magnetic door gasket make cleaning and replacement an easy process.
· High strength, die-cast door handles.
· Pre-installed door locks keep your items safe from theft.

Shelving
· Four epoxy coated, steel wire shelves with airflow guard per section.
· Height adjustable stainless steel clips.

Temperature Control
· Multi-function digital controller with easy to read LED display.
· Factory preset temperature, -4°F. Temperature setting range from -10°F to 54°F.

Options
· Additional shelving.
· 3" swivel casters with locks.
· 3.5" – 6" height-adjustable and interchangeable legs.
· Left hinged door.

Type	Doors	Capacity Cu. Ft.	# of Pans (Top)	# of Pans (Drawer)	Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Crated Weight	Exterior Dimensions		
											L	D	H*
FRZ	1	23	-	-	4	R-290	1	115-60-1	11.06	419 lbs	29.125"	31.625"	80.125"

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (⚑) Product capacity is calculated based on standard industry figures. (※) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

GLASS DOOR MERCHANDISER FREEZER
SWING DOORS

EMGF23B — EM Series

DIMENSIONAL DATA

External Dims.	L	29.125 in.
	D	31.625 in.
	H*	80.125 in.
Crated Weight		419 lbs.
Doors/Drawers/Lids		1
Max Weight Support		-

STORAGE DATA

Net Capacity Cu. Ft. ⚑	23
Shelves	4
Barrels	-
20 oz. Bottles	-
12 oz. Bottles	-
12 oz. Cans	-
8" Mugs	-
# of Pans (Top)	-
# of Pans (Drawer)	-
Dividers	-
Trays	-

ELECTRICAL DATA

Voltage	115-60-1
Full Load Amperage	11.06A
Feed Wires w/ Ground	3
Cord Length	9ft
NEMA Plug Type	NEMA 5-20P

REFRIGERATION DATA


Compressor	Bottom
Refrigerant	R-290
Compressor HP	1
BTU/HR†	4036

KEY


D	Door	**R**	Refrigerator
L	Lid	**REF**	Refrigerator
H	Half Door	**F**	Freezer
FD	Full Door	**FRZ**	Freezer
SD	Solid Door	**DUAL**	REF/FRZ Combo
GD	Glass Door	**DR**	Drawer

	Elevation	Right	Plan	3D	Back
KCL					


PLAN VIEW

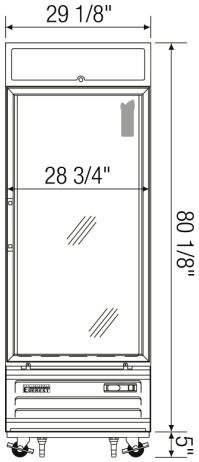

FRONT

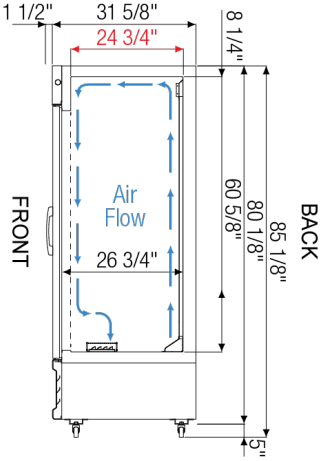

SIDE



TOP

ACCESSORIES & OPTIONS

- ☐ Additional Shelving - Contact Everest Refrigeration for more information.
- ☐ AJL03-00 - Interchangeable Leg for Caster (Optional)
- ☐ CASA3-01 - 3" Overall Height Caster Assembly - (2) Front (2) Rear
- ☐ Left Hinged Door - Contact Everest Refrigeration for more information.

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). (⚑) Product capacity is calculated based on standard industry figures. (✲) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.