

DUKERS

Quality Commercial Refrigeration

3 YEARS PARTS & LABOR
PREMIUM
WARRANTY
5 YEAR COMPRESSOR

REACH IN REFRIGERATOR

D28R-GS1

Bottom Mounted / Glass Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency
115V/60Hz
Refrigerant
R290
Type of Defrost
Automatic
Interial Material
Stainless Steel
Exterior Material
Stainless Steel
Temperature Range °F
33 ~ 41°F
Compressor Power (HP)
1/5
Nema Config.
NEMA5-15P

PRODUCT FEATURES

- Equipped with Locking Doors
- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.

HIGH QUALITY
STAINLESS STEEL &
ROBUST DESIGN

DUKERS


Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com


DETAILS & SPECIFICATIONS

D28R-GS1

Front View

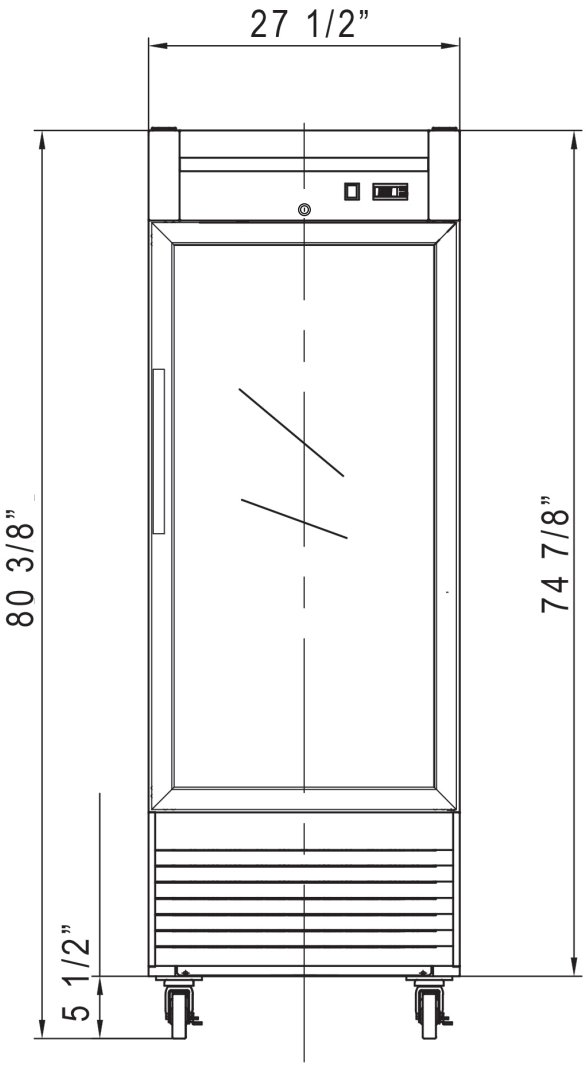

Side View

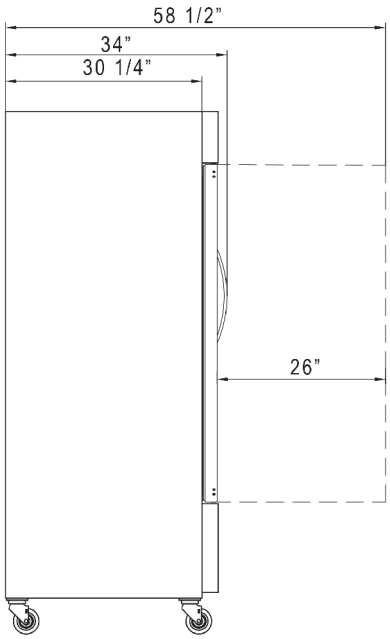

MODEL D28R-GS1	
Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	260W
Total Current	3.1A
Total Capacity	18.75 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/3.17 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D28R-GS1	27 1/2 x 34 x 80 3/8	29 1/2 x 35 x 82 3/8	344 lbs	4	39

NATURAL REFRIGERANT

PROUD MEMBER CFESA Commercial Food Equipment Service Association

AQ AutoQuotes

c ETL LISTED us Intertek

ETL SANITATION LISTED Intertek

115/60/1 NEMA-5-15P

DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com