



# CHEF BASE

## MODEL DCB48



### TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60HZ  
 Refrigerant R290/1.76oz  
 Type of Defrost Automatic  
 Interior Material 304/201 Stainless Steel  
 Exterior Material 304/201 Stainless Steel  
 Total Current 1.7A  
 Climatic Category 4-5  
 Nema Config. NEMA5-15P  
 Compressor Power (HP) 1/5

| TEMPERATURE RANGE (F°) | EXTERNAL DIMENSION WXDxH (INCHES) | PACKAGING DIMENSION WXDxH (INCHES) | PRODUCT NET WEIGHT | DRAWERS | 40 HQ CONTAINER CERTIFICATION |
|------------------------|-----------------------------------|------------------------------------|--------------------|---------|-------------------------------|
| 33~38°F                | 48"x 32 1/4" x 26 5/8             | 49" x 34 1/4" x 29 1/8             | 180 lbs            | 2       | 66                            |



### PRODUCT FEATURES

- Digital temperature control features a digital display to make monitoring interior temperatures a breeze. This unit also comes with an auto-defrost function.
- Foamed-in-place insulation keeps the interior cold and adds structural strength.
- Stainless steel Interior with rounded corner for easy cleaning. Meet and exceed sanitation standards.
- Durable and high weight bearing rails for drawers. 4 divider bars per drawer.
- Heavy-duty 4" casters with brakes are included providing the unit with convenient mobility, making cleaning and servicing a breeze! Just roll the unit away from the wall.
- Ergonomic and modern recess door handles.
- Removable Drawer Gaskets, each drawer gasket is removable for easy cleaning and maintenance.



### HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas  
 Houston | Florida | Chicago | New Jersey


1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com

# DETAILS & SPECIFICATIONS

## CHEF BASE

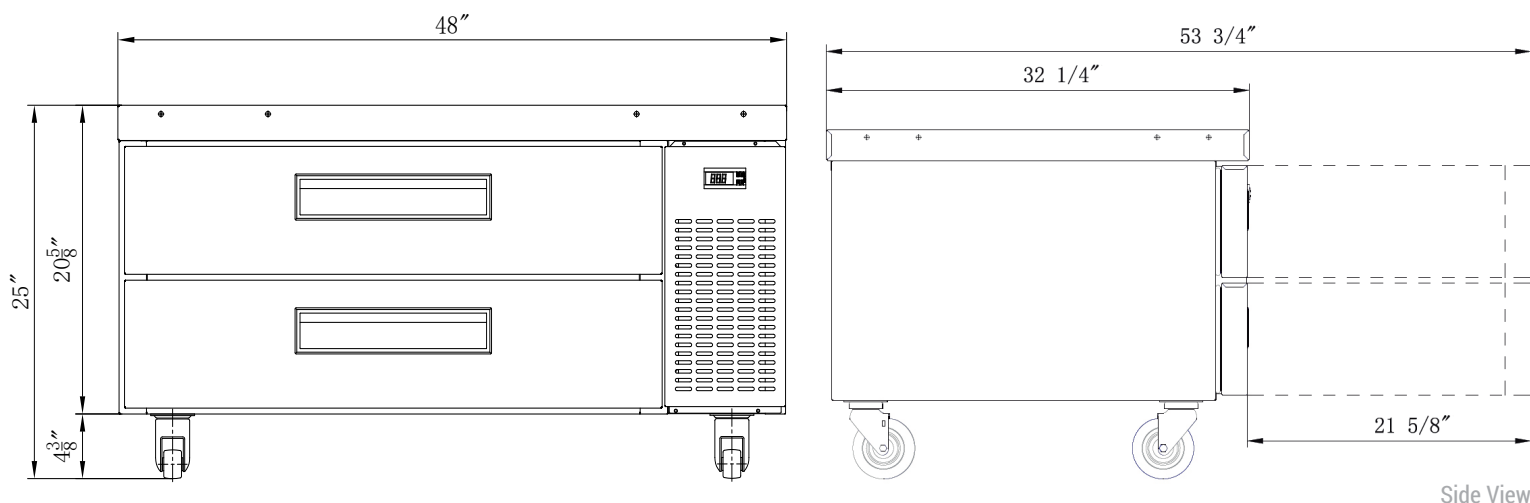


Side View


### MODEL DCB48

|                               |              |
|-------------------------------|--------------|
| Rated Voltage                 | 115V         |
| Rated Frequency               | 60Hz         |
| Total Input Power             | 200W         |
| Total Current                 | 1.7A         |
| Climatic Category             | 4-5          |
| Protection Type               | I            |
| Design Pressure High Side     | 300 PIG      |
| Design Pressure Low Side      | 150 PIG      |
| Insulation Blowing Gas        | C-Pentane    |
| Net Weight                    | 180 lbs      |
| Nema Config.                  | NEMA5-15P    |
| Temperature Range             | 33~38°F      |
| Heating Power                 | 192.9W       |
| 40 HQ Container Certification | 66           |
| Refrigerant                   | R290/1.76 oz |
| 1/6 Pan Count                 | 15           |
| Compressor Power (HP)         | 1/5          |


Pan Layout

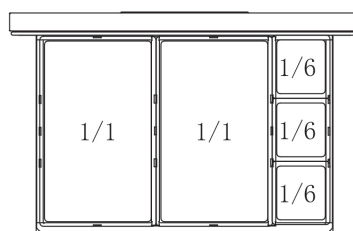

FULL PANS

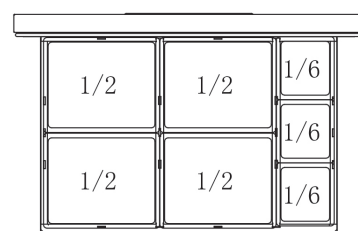

HALF PANS

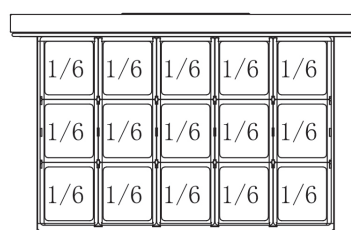

SIXTH PANS



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com