

DUKERS
Quality Commercial Refrigeration

2 YEARS PARTS & LABOR
PREMIUM
WARRANTY
5 YEAR COMPRESSOR

BOTTLE COOLERS



Thermometer



Bottle opener



DHBC50 / DHBC65



DHBC36



PRODUCT FEATURES

- Equipped with electronic controls, users can adjust the temperature from 33 to 38 degrees Fahrenheit
- Heavy duty Cubigel compressor with ***environmentally friendly R290 refrigerant***
- Easy glide stainless steel lid(s) with handle(s)
- Bottle opener & cap catcher standard
- Wire dividers standard
- Pre-installed casters
- Lid lock(s) standard

Each model can hold up to:

	12-oz. bottles	*12-oz. cans*
DHBC36	11.5 cases	15.6 cases
DHBC50	17 cases	23 cases
DHBC65	22.5 cases	30.6 cases

TECHNICAL SPECIFICATIONS

Voltage/Frequency	110V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interial Material	Stainless Steel
Exterior Material	Stainless Steel
Temperature Range °F	33 ~ 38°
Compressor Power (HP)	1/5
Nema Config.	NEMA5-15P


HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN

DUKERS
Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com


DETAILS & SPECIFICATIONS

Side View

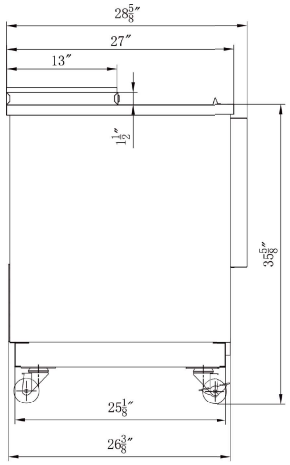


DHBC36

Front View

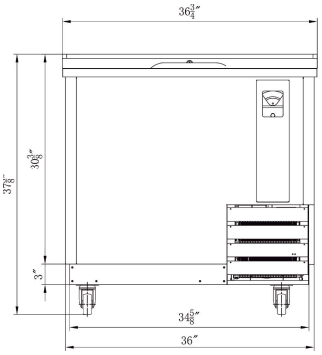


Top View




FDHBC50

Front View

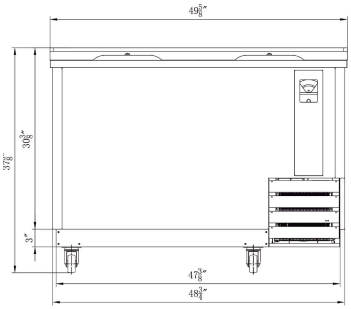


Top View




DHBC65

Front View

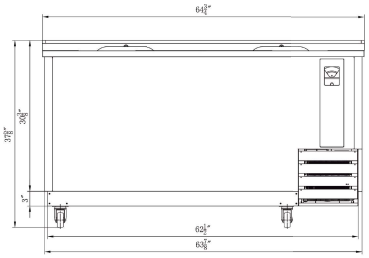

Top View

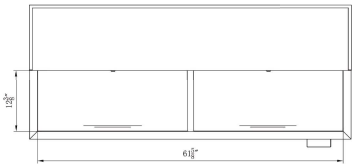

Intertek

Intertek

115/60/1
NEMA-5-15P

NATURAL REFRIGERANT

PROUD MEMBER CFESA
Commercial Food Equipment Service Association

Model	Bottle Capacity (# bottles)	External Dimensions (inches)			External Dimensions (inches)			Temperature Range °F	Volume		Electric Current (A)	Power (W)	Net Weight (Kg)	Gross Weight (Kg)	40FT (PCS)
		W	D	H	W	D	H		L	cu.ft					
DHBC36	278	36 6/8″	28 5/8″	37 5/8″	38 3/8″	31 7/8″	41″	33~41°F	223	7 7/8″	2.00	250	70	85	56
DHBC50	410	49 5/8″			51 1/8″				326	11 1/2″	2.20	260	80	99	44
DHBC65	542	64 6/8″			66 3/8″				448	15 5/6″	2.40	280	100	120	28

* All measures are presented in inches and pounds

DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com