

Item#_____
Qty# _____
Model#_____
Project#_____

DUKERS
QualityCommercialRefrigeration

1 YEAR WARRANTY
PARTS & LABOR

GASRANGE

DCR60-6B24GM

60"Combination-6Burner&24"GriddleTop





Knobs



CookingSurface





GASRANGE MODEL	DIMENSION		
	Width	Depth	Height
DCR60-6B24GM	60in	311/2in	56in

PRODUCTDESCRIPTION

- Stainless steel exterior including front, back sides,kickplate,backguardandovershelf
- Heavyduty12”X12”removable,castiron topgrates
- Oven temperature range between 175°F to 500°F
- 3/4”NPTreargasconnectionandregulator standard.
- Two(2)chromeovenrackperovenstandard, multiplepositionovenrackguides
- Enamelinteriorovenforeasycleaning.
- 6"casterswithlockforeasymobility.
- 3/4"SteelPlate.

HIGHQUALITY STAINLESSSTEEL& ROBUSTDESIGN


DUKERS
LosAngeles|SanFrancisco|Dallas
Houston|Florida|Chicago|NewJersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com


DETAILS& SPECIFICATIONS

DCR60-6B24GM


FrontView

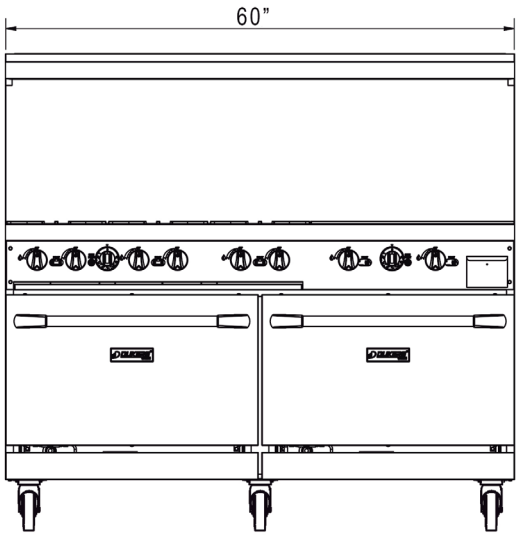

SideView

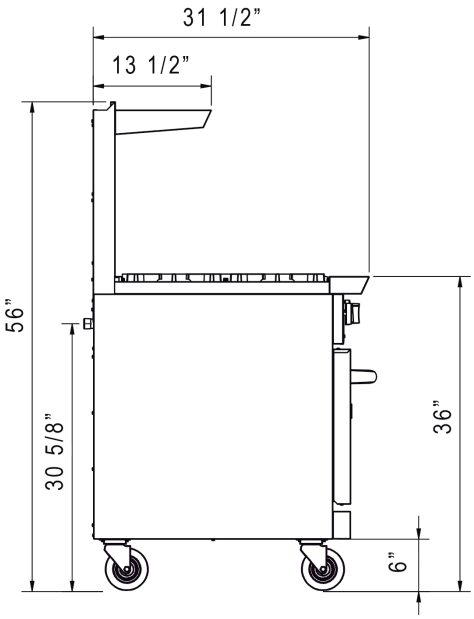

TopView

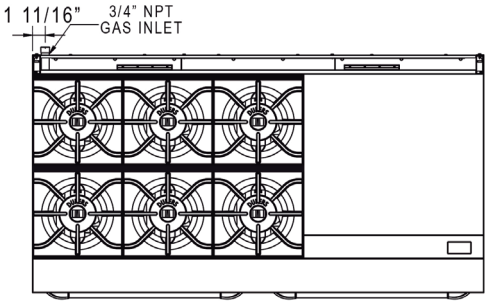

SANITATION C US

Conforms to NSF/ANSI7 (ETL)

PROUD MEMBER CFESA Commercial Food Equipment Service Association

ProductSpecifications

WORKINGAREA 36"x24"&24"x20"

GASTYPE LPG/NG

OVEN SIZE (2) 20¾×26×14”

	LPG			NG		
	HOTPLATE	GRIDDLE	OVEN	HOTPLATE	GRIDDLE	OVEN
BURNERS	6	2	2	6	2	2
SINGLEOUTPUTBTU	30000BTU	28000BTU	35000BTU	33000BTU	28000BTU	35000BTU
NOZZLE#	52	53	49	41	43	38
TOTALOUTPUTBTU		306000BTU			324000BTU	
GASPRESSURE		10			5	

Model	PackagingDimensions(inches)			NetWeight (lbs)	ShipWeight (lbs)	ContainerCapacity 40'HQ
	W	D	H			
DCR60-6B24GM	62”	364/5”	381/5”	626.12	744.92	44

DUKERS

LosAngeles|SanFrancisco|Dallas
Houston|Florida|Chicago|NewJersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com