TRUE FOOD SERVICE EQUIPMENT, INC. • 2001 East Terra Lane • O'Fallon, Missouri 63366-4434
ph. 636.240.2400 • toll free 800.325.6152 • fax 636.272.2408 • parts fax 636.272.9471 • www.truemfg.com

| Project Name | Location | | AIA # |
|---|---|---|---|
| Item # | Qty | Model # | SIS # |

# SPEC SERIES®

REACH-IN SOLID SWING DOOR REFRIGERATORS WITH HYDROCARBON REFRIGERANT

| models | STR1R-1S-HC | STA1R-1S-HC | STG1R-1S-HC |
|---|---|---|---|



## STR1R-1S-HC

| | |
|---|---|
| **Exterior** | Stainless steel door, front & sides. |
| **Interior** | Stainless steel side walls, back, floor, door liner, & ceiling. |
| **Shelving** | (1) Interior kit option included per full section, factory installed. |


## STA1R-1S-HC

| | |
|---|---|
| **Exterior** | Stainless steel door, front & sides. |
| **Interior** | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| **Shelving** | (3) Heavy duty, chrome plated, wire shelves per section. |


## STG1R-1S-HC

| | |
|---|---|
| **Exterior** | Stainless steel door & front, with matching aluminum sides. |
| **Interior** | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| **Shelving** | (3) Heavy duty, PVC coated, wire shelves per section. |


## plan view

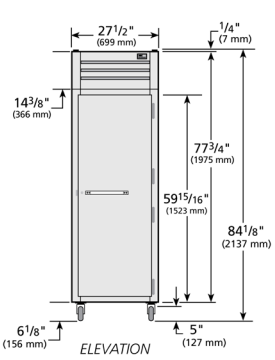

ELEVATION



RIGHT VIEW



PLAN VIEW

## SPECIFICATIONS

| Dimensions | in. | mm. |
|---|---|---|
| Length | 27½ | 699 |
| Depth | 33¾ | 858 |
| Height | 77¾ | 1975 |
| **Electrical** | **U.S.** | **International** |
| Horsepower | ¼ | N/A |
| Amps | 3.8 | N/A |
| Voltage | 115/60/1 | |
| NEMA | 5-15P | |
| Cord Length | 9 ft. | 2.74 M. |


115/60/1
NEMA-5-15R

* Height does not include 6⅛" (156 mm) for castors or 6" (153 mm) for optional legs. Height does not include ¼" (7mm) for system mechanical components.
† Depth does not include 1½ for door handle.

Specifications subject to change without notice.
Chart dimensions are roundedup to the nearest ⅛" (millimeters rounded up to the next whole number).

MADE WITH INNOVATION IN THE USA · ENERGY STAR · c UL us · natural refrigerant.

2/26 Printed in U.S.A.

Approvals

Available at

TRUE FOOD SERVICE EQUIPMENT, INC. • 2001 East Terra Lane • O'Fallon, Missouri 63366-4434
ph. 636.240.2400 • toll free 800.325.6152 • fax 636.272.2408 • parts fax 636.272.9471 • www.truemfg.com

| Project Name | Location | | AIA # |
|---|---|---|---|
| Item # | Qty | Model # | SIS # |

# SPEC SERIES®

REACH-IN SOLID SWING DOOR REFRIGERATORS WITH HYDROCARBON REFRIGERANT

| models | STR1R-1S-HC | STA1R-1S-HC | STG1R-1S-HC |
|---|---|---|---|



## standard features

### REFRIGERATION SYSTEM

- Factory engineered, self-contained, expansion valve (TXV) system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Top mounted refrigeration system with evaporator positioned out of food zone to maximize capacity.
- Electronic control.

### CABINET CONSTRUCTION

- Insulation - Entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter plate castors - locks provided on front set.

### DOOR

- Lifetime guaranteed bolt style door lock standard.
- Lifetime guaranteed heavy duty all metal working door handle.
- Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

### LIGHTING

- LED interior lighting, safety shielded.

### MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C .
- Evaporator epoxy coated to eliminate the potential of corrosion
- Curb mounting ready.
- NSF/ANSI Standard 7 compliant for open food product.

### ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

### OPTIONAL FEATURES/ ACCESSORIES

***(upcharge & lead times may apply)***

- 6" (153 mm) standard legs.
- 6" (153 mm) seismic/flanged legs.
- 6" (153 mm) stainless steel legs.
- Field reversible hinge.
- Additional shelves.
- Stainless back. (STR, STA, STG)
- Security package.

### SHELVING KIT OPTIONS

- STR series kits factory installed at no charge. STA & STG series kits field installed, upcharge applies, lead times may apply.
- Kit #1: Nine (9) sets of #1 type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan or two (2) 14"L x 18"D (356 mm x 458 mm) pans.
- Kit #2: One (1) set half-section #2 steel rod tray slides and pilasters (field installed), rim support of one (1) 18"L x 26"D (458 mm x 661 mm) pan.
- Kit #3: Six (6) sets of universal type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan, two (2) 14"L x 18"D (356 mm x 458 mm) pans or two (2) 12"L x 20"D (305 mm x 508 mm) pans.
- Kit #4: Three (3) chrome shelves 26 5/16"L x 21 9/16"D (669 mm x 548 mm). Optional wall mounted shelf support pilasters (field installed) with four (4) shelf clips per shelf available; adjustable on ½" (13 mm) increments (must order at time of cabinet order).
- Additional kit option components available individually.

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

| KCL | Model | Elevation | Right | Plan | 3D | Back |
|---|---|---|---|---|---|---|
| | ST( )1R-1S-HC | | | | | |