F-330BAJ(-C)

SELF-CONTAINED ICE MACHINE
BUILT-IN STORAGE BIN

F-330BAJ(-C)
07/02/24
Item # 13200

Item #: _____

Project: _____

Qty: _____

AIA#: _____

W x D x H
24" x 26" x 39"*
*with 6" legs

Shipping Dimensions
33" x 25 1/4" x 38 1/2"

F-330BAJ
Air-Cooled

F-330BAJ-C
Air-Cooled

Features

- **Front breathing allows for easier fit into tight spaces**
- **Durable stainless steel exterior**
- **Stainless steel auger with greaseless bearing**

- F-330BAJ - Up to 332 lbs. of ice production per 24 hrs.
- F-330BAJ-C - Up to 288 lbs. of ice production per 24 hrs.
- Built-in storage capacity of 2.7ft³/80 lbs.*
- Advanced CleanCycle24™ design
- 2 second flush cycle every hour
- Convenient drop down door
- Front access for easier maintenance
- Removable air filters
- Equipped with 8 ft. cord with NEMA 5-15P Plug
- R-404A Refrigerant

FACTORY WARRANTY
Parts & Labor 3 YR Entire Machine
Parts 5 YR Compressor

Warranty:
3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.
*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

			ICE PRODUCTION		WATER USAGE		ELECTRICAL						
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F	90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Air	F-330BAJ (Flaker)	332	243	12.0	N/A	5.91	15A	6.9A	115V/60/1	3,400	7.1 oz	147 / 178
Air	F-330BAJ-C (Cubelet)	288	214	12.0	N/A	7.30	15A	7.1A	115V/60/1	3,400	7.1 oz	148 / 178

Cube Dimensions*

Flaked F-330BAJ

Cubelet F-330BAJ-C



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter (Air-cooled model only)
- Allow 24"(61 cm) clearance at top for removal of auger.
- Appliance should not be located next to high heat producing equipment.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Printed in the U.S.A.

Hoshizaki reserves the right to change specifications without notice.

F-330BAJ(-C)

SELF-CONTAINED ICE MACHINE
BUILT-IN STORAGE BIN

F-330BAJ(-C)
07/02/24
Item # 13200

inch
(mm)

FRONT VIEW
AIR-COOLED

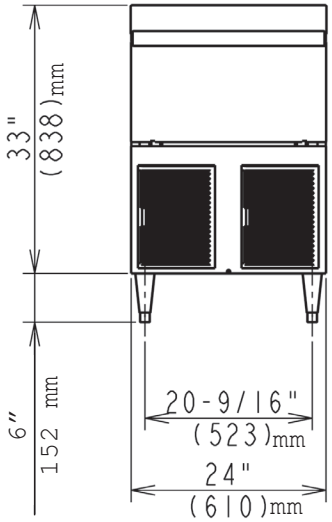

SIDE VIEW

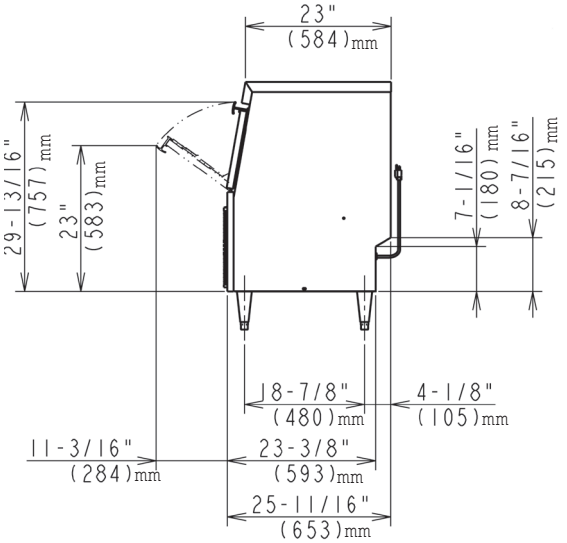

TOP VIEW
AIR-COOLED

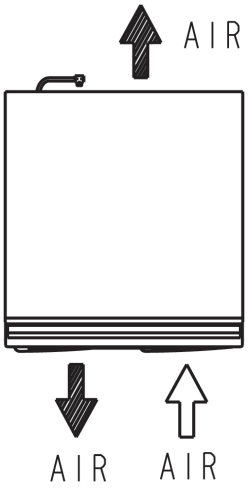

REAR VIEW
AIR-COOLED

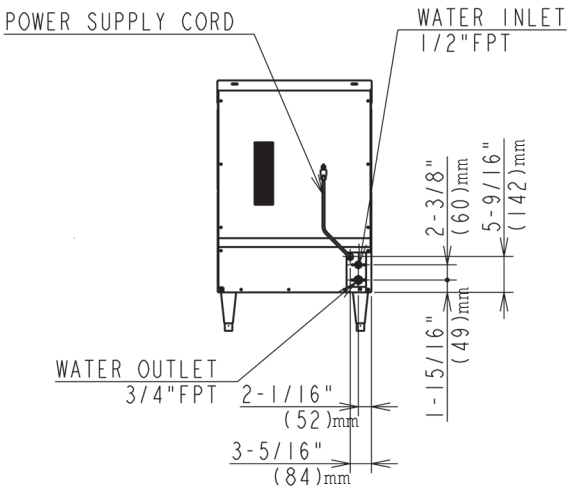

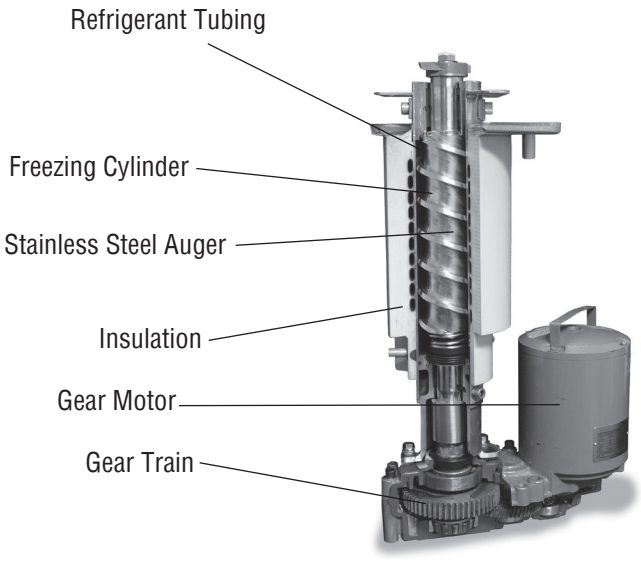

EVAPORATOR