F-1501M_J(Z)(-C)

Modular Ice Machine
Slim-Line Series

F-1501M_J(Z)(-C)
07/07/23
Item # 13339

Item #: _____

Project: _____

Qty: _____

AIA#: _____

W x D x H
30" x 27 3/8" x 34 5/8"

Shipping Dimensions
34 3/4" x 32" x 40"

F-1501MAJ
Air-Cooled Flaker
Shown on optional bin B-900

F-1501MWJ
Water-Cooled Flaker

F-1501MRJZ
Remote Air-Cooled Flaker

F-1501MAJ-C
Air-Cooled Cubelet

F-1501MWJ-C
Water-Cooled Cubelet

F-1501MRJZ-C
Remote Air-Cooled Cubelet

Features

- **Durable stainless steel exterior**
- **Advanced CleanCycle24™ design** (ADVANCED 24 CleanCycle)
- **Stainless steel auger with greaseless bearing**

- Flaker - Up to 1705 lbs. of ice production per 24 hours
- Cubelet - Up to 1376 lbs. of ice production per 24 hours
- Mount two units, side-by-side, in only 60" of floor space for double the amount of ice production
- 2 second flush cycle every hour
- Flush cycle removes sediment for cleaner ice
- Infrared bin control for easy cleaning and reliability
- R-404A Refrigerant

Available on Bins:

B-250SF	B-700SF	B-900SF	B-1300SS	B-1650SS
B-500SF	B-800SF	B-1150SS	B-1500SS	

Top kit may be required. See Bin Spec Sheets.

Warranty:
3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

FACTORY WARRANTY
Parts & Labor 3 YR Entire Machine
Parts 5 YR Compressor

Condenser	Model	ICE PRODUCTION Air / Water Temp Lbs. per 24 hours 70 / 50 F	ICE PRODUCTION 90 / 70 F	WATER USAGE Potable Gal. per 100 lbs. 90 / 70 F	WATER USAGE Condenser Gal. per 100 lbs. 90 / 70 F	ELECTRICAL kWh Used per 100 lbs. 90 / 70 F	ELECTRICAL Min. Circuit/ Max. Fuse Size	ELECTRICAL Amperage	ELECTRICAL Voltage	ELECTRICAL Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Air	F-1501MAJ	1543	1154	12.0	N/A	4.00	20A	15.9A	208-230/60/1	4	12,300	2 lbs. 5 oz.	300 / 325
Water	F-1501MWJ	1624	1410	12.0	105	3.20	20A	15.4A	208-230/60/1	4	12,900	1 lb. 4.5 oz.	300 / 350
Remote	F-1501MRJZ	1532	1181	12.0	N/A	4.00	20A	15.3A	208-230/60/1	4	13,800	5 lb. 2.5 oz. 9 lbs. 9 oz. †	300 / 325
Air	F-1501MAJ-C	1327	1020	12.0	N/A	4.61	20A	15.9A	208-230/60/1	4	12,300	2 lbs. 5 oz.	300 / 325
Water	F-1501MWJ-C	1376	1218	12.0	123	3.76	20A	15.4A	208-230/60/1	4	12,800	1 lb. 4.5 oz.	300 / 330
Remote	F-1501MRJZ-C	1353	1054	12.0	N/A	4.50	20A	15.3A	208-230/60/1	4	13,800	5 lb. 2.5 oz. 9 lbs. 9 oz. †	300 / 325

†(with condenser)

Ice machines must be hard-wired at site.

Cube Dimensions*

Flaked F-1501M_J(Z)



Cubelet F-1501M_J(Z)-C



* approximate size in inches, image not to scale

Operating Limits

• Ambient Temp Range	45 - 100°F
• Water Temp Range	45 - 90°F
• Water Pressure	10 - 113 PSIG
• Voltage Range	187-253V

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter (Air-cooled model only)
- Allow 6" (15 cm) clearance at rear and sides, and 24" (61 cm) clearance at top for proper air circulation and ease of maintenance/service.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Hoshizaki reserves the right to change specifications without notice.

© HOSHIZAKI AMERICA, INC.
618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com

F-1501M_J(Z)(-C)

Modular Ice Machine
Slim-Line Series

F-1501M_J(Z)(-C)
07/07/23
Item # 13339

FRONT VIEW

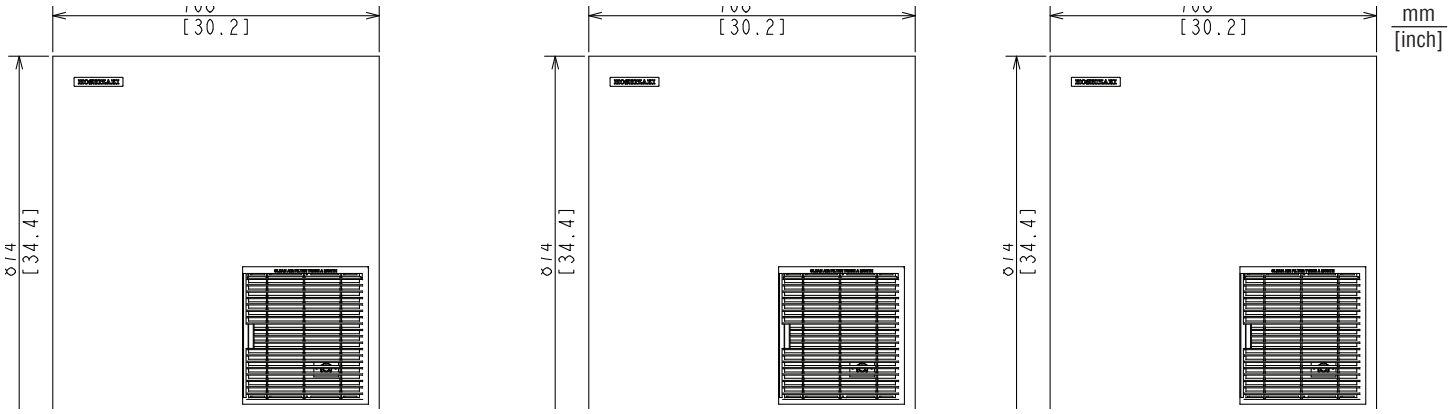

AIR-COOLED | WATER-COOLED | REMOTE AIR-COOLED

SIDE VIEW

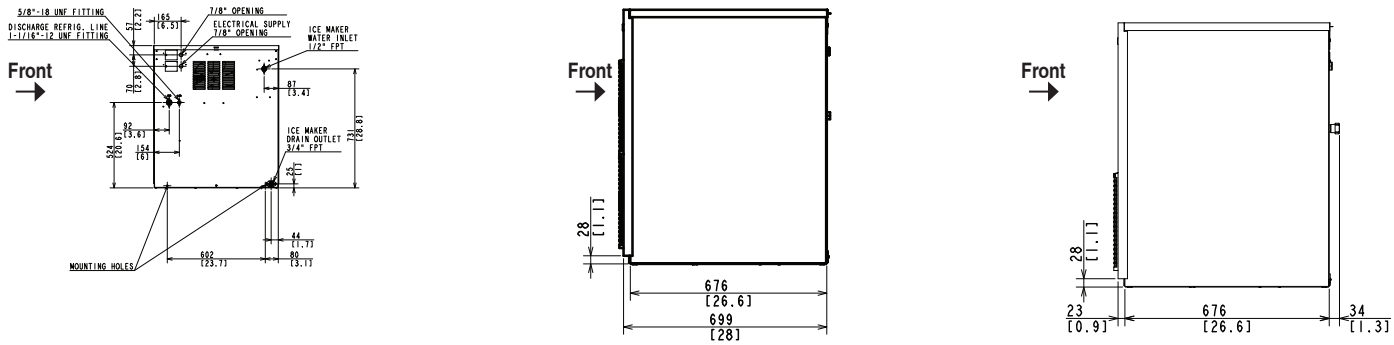

AIR-COOLED | WATER-COOLED | REMOTE AIR-COOLED

REAR VIEW

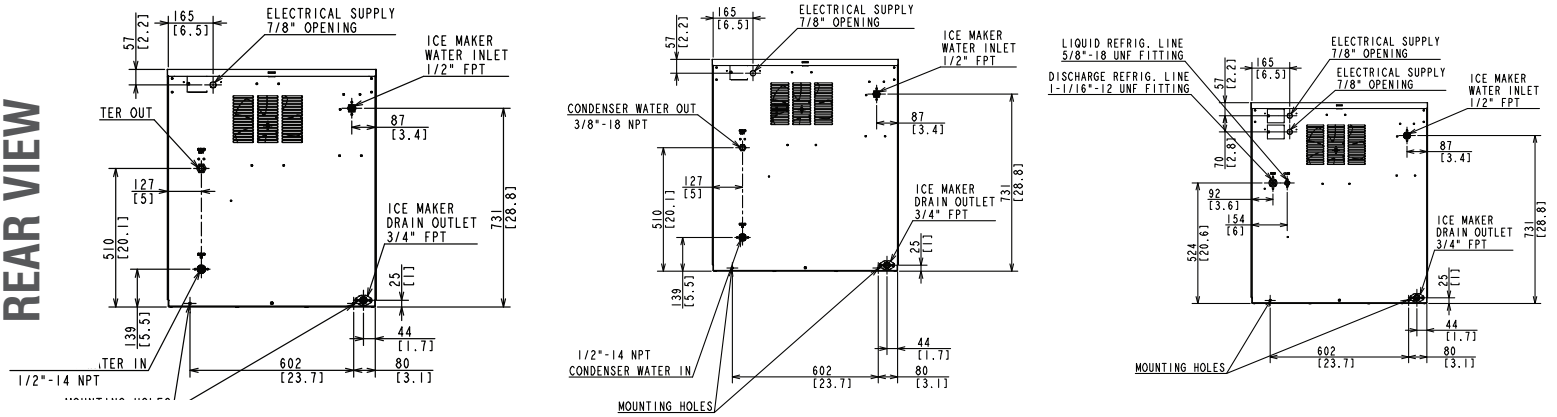

AIR-COOLED | WATER-COOLED | REMOTE AIR-COOLED

BOTTOM VIEW

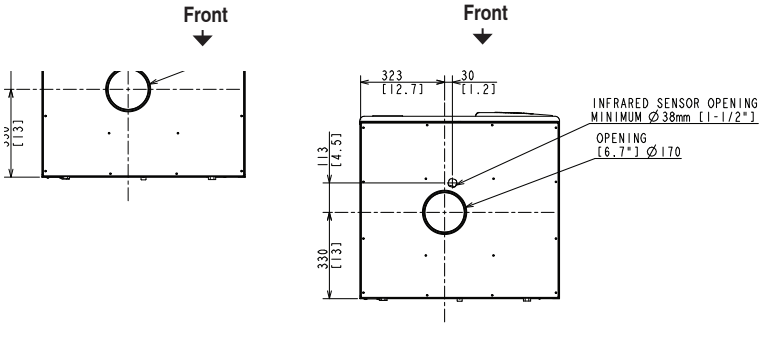

AIR-COOLED | WATER-COOLED
REMOTE AIR-COOLED

URC-14FZ Remote Condenser (Sold Separately)
(W x D x H) 35 11/16 x 14 1/16 x 36 1/2
For Use with F-1501MRJZ(-C)

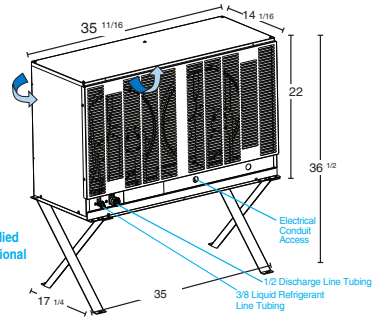

Brazed Line Sets
(Sold Separately)
25' HS-5604
35' HS-5605
55' HS-5606

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No addtional circuit is required.

© HOSHIZAKI AMERICA, INC. 618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com