REFRIGERATOR MANUFACTURER
Turbo air
more durable, efficient, beautiful

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

| | |
|---|---|
| Project: | |
| Model #: | |
| Item #: | |
| Available W/H: | Qty: |
| Approval: | |
| AIA #: | SIS #: |
| CSI Section 11400 | |

# Sliding Door Merchandisers

*Glass Door Merchandisers*
*Refrigerators*

## Model : TGM-69RB-N
## TGM-69R-N

## FEATURES & BENEFITS

- ***Hydrocarbon refrigerants (R-290)***
  With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

- ***Energy conserving fan control***
  Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

- ***Hot gas condensate system***
  Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

- ***Double pane glass doors with Low-E glass***
  Energy saving double pane glass doors are equipped with Low-emissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

- ***High-density polyurethane insulation***
  The entire cabinet structure and solid doors are foamed-in-place using high density, HCFC free polyurethane insulation.

- ***Adjustable, heavy duty, PE (polyethylene) coated wire shelves***

- ***LED advertising panel***
  LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

- ***LED interior lighting***

- ***Refrigerator holds 33°F ~ 38°F for the best in beverage preservation***

- ***Stay open door for easy loading of product***




TGM-69R-N




TGM-69RB-N

NATURAL Refrigerant · SPEC ISO 9001:2008 · Intertek · Intertek · 2 YEAR WARRANTY · Compressor 5 YEAR WARRANTY (U.S.A only)

| Model | Sliding Door | CU./FT. | #of Shelves | HP | AMPS | Crated Weight (lbs.) | L x D* x H (inches) |
|---|---|---|---|---|---|---|---|
| **TGM-69R(B)-N** | **3** | **61.83** | **12** | **1/2** | **6.8** | **681** | **78 x 30 1/8 x 79 5/8** |



* Depth does not include 3/4" for door handle.

# Sliding Door Merchandisers

*Glass Door Merchandisers*
*Refrigerators*


## Model : TGM-69R(B)-N

| ELECTRICAL DATA | |
|---|---|
| Voltage | 115/60/1 |
| Plug Type | NEMA 5-15P |
| Full Load Amperes | 6.8 |
| Compressor HP | 1/2 |
| Cord Length (ft.) | 7 |
| Refrigerant | R-290 |
| **DIMENSIONAL DATA** | |
| # of Doors | 3 |
| Net Capacity (cu. ft.) | 61.83 |
| Ext. Length Overall (in.) | 78 (1981mm) |
| Ext. Depth Overall (in.)* | 30 1/8 (767mm) |
| Ext. Height Overall (in.) | 79 5/8 (2024mm) |
| Int. Length Overall (in.) | 74 3/8 (1890mm) |
| Int. Depth Overall (in.) | 23 1/4 (590mm) |
| Int. Height Overall (in.) | 61 5/8 (1565mm) |
| # of Shelves | 12 |
| Shelf Size (L x D) (in.) | 23 1/2 x 23 |
| Bottle Capacity (12 oz) | 860 (Full) 672 (Load Line) |
| Net Weight (lbs.) | 654 |
| Gross Weight (lbs.) | 681 |


Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.
* Depth does not include 3/4" for door handle.

## PLAN VIEW

(unit : inch)

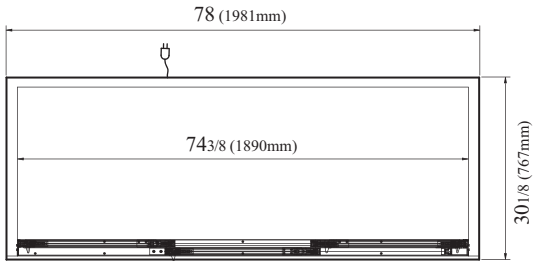


**PLAN VIEW**

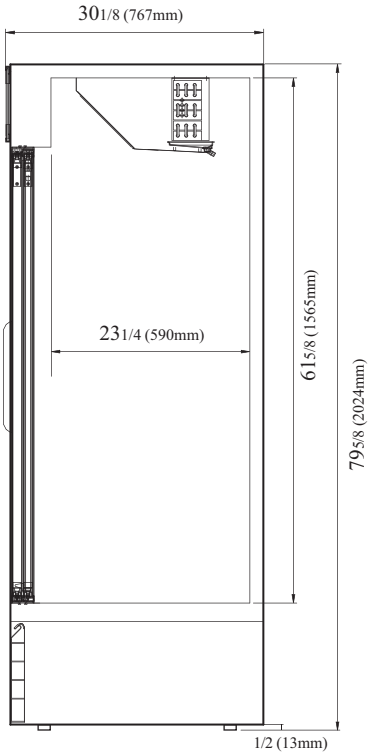


**SIDE VIEW**

■ **WARRANTY :** 2 Year Parts and Labor Warranty
Additional 3 Year Warranty on Compressor

## ■ STANDARD FEATURES

- ***Anti-corrosion coated evaporator***
- ***White and black color cabinet available***

## ■ OPTIONAL ACCESSORIES

- 4" caster, ½" diameter & 13 TPI: 30265L0400 (non-brake), 30265L0300 (w/ brake)
- Additional PE coated wire shelf: 30278K0101
- Sign panel (blank): 30214K1402

Ver.20240624

NATURAL Refrigerant


■ **Turbo Air**: 800-627-0032 ■ **Radiance**: 800-500-3519
■ **Warranty**: 800-381-7770 ■ **AC**: 888-900-1002


Turbo air | RADIANCE | Turbo air | TEXAKING


Continued product development may necessitate specification changes without notice.