REFRIGERATOR MANUFACTURER
Turbo air
more durable, efficient, beautiful

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

| | |
|---|---|
| Project: | |
| Model #: | |
| Item #: | |
| Available W/H: | Qty: |
| Approval: | |
| AIA #: | SIS #: |
| CSI Section 11400 | |

# Curved Glass Bakery Cases

*Display Cases*
*Bakery Cases - Combination Cases*

**Patented Self-Cleaning Condenser**




This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

## Model : TCGB-72CO-W(B)-N

**REFRIGERATED & DRY CASE COMBINATION**



TCGB-70CO-W-N

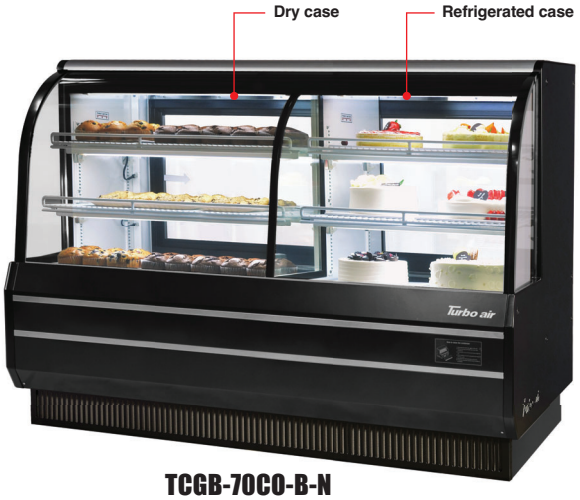


TCGB-70CO-B-N

## FEATURES & BENEFITS

- ***Self-Cleaning Condenser***
  The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

- ***Hydrocarbon refrigerants (R-290)***
  With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

- ***Attractive, elegant, glass sided Euro design***
  Curved tempered front glass and minimal frame provide full product visibility to optimize display effects. Its elegant contemporary euro design will not only enhance any store atmosphere but also will keep product presentation at its best and most beautiful.

- ***Stainless steel floor and airflow grille***

- ***LED interior lighting under each shelf***

- ***High-density polyurethane insulation***
  The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.

- ***Low-E coated double pane glass is tempered for safety***

- ***Heavy duty, white PE coated wire shelves***

- ***Cantilever wired shelves adjustable up and down, tilted***

- ***Sliding rear doors for product loading & unloading***

- ***Rear access to compressor compartment for quick and easy service***

- ***Refrigerated bakery case holds avg. 33°F ~ 41°F for fresher bakery products***

NATURAL Refrigerant · Intertek · Intertek · 2 YEAR · Compressor 5 YEAR WARRANTY (U.S.A. only)

| Model | CU./FT. | # of Shelves | HP | AMPS | Crated Weight (lbs.) | L x D x H* (inches) |
|---|---|---|---|---|---|---|
| TCGB-72CO-W(B)-N | 12.2 x 2 | 4 | 1/3 | 7.5 | 864 | 72 1/2 x 34 1/4 x 49 7/8 |



* Height does not include 5/8" for bolt height.

# Curved Glass Bakery Cases


## Model : TCGB-72CO-W(B)-N

| ELECTRICAL DATA | |
|---|---|
| Voltage | 115/60/1 |
| Plug Type | NEMA 5-15P |
| Full Load Amperes | 7.5 |
| Compressor HP | 1/3 |
| Cord Length (ft.) | 4 7/8 |
| Refrigerant | R-290 |
| **DIMENSIONAL DATA** | |
| Net Capacity (cu. ft.) | 12.2 x 2 |
| Ext. Length Overall (in.) | 72 1/2 (1842mm) |
| Ext. Depth Overall (in.) | 34 1/4 (869mm) |
| Ext. Height Overall (in.)* | 49 7/8 (1267mm) |
| Int. Length Overall (in.) | 34 (865mm) x 2 |
| Int. Depth Overall (in.) | 22 1/4 (566mm) |
| Int. Height Overall (in.) | 25 3/8 (646mm) |
| Shelf Size (L x D) (in.) | (2) 32 7/8 x 16 7/8 |
| | (2) 32 7/8 x 18 7/8 |
| # of Shelves | 4 |
| Net Weight (lbs.) | 703 |
| Gross Weight (lbs.) | 864 |


Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.
* Height does not include 5/8" for bolt height.

## PLAN VIEW


(unit : inch)

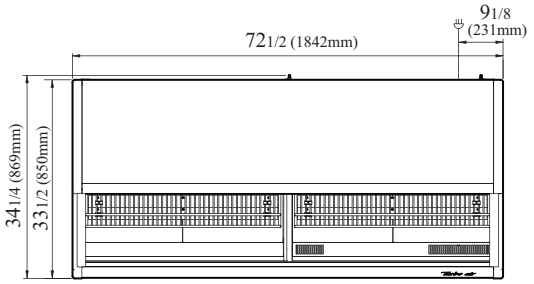


TOP VIEW

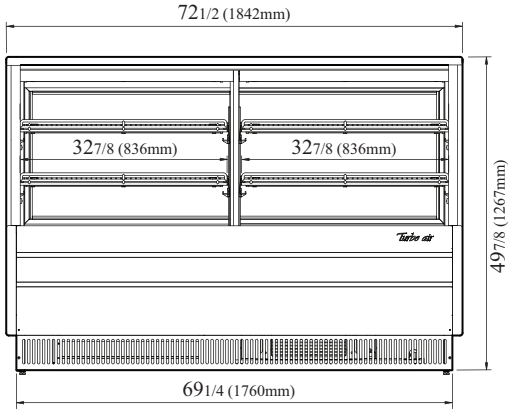


FRONT VIEW

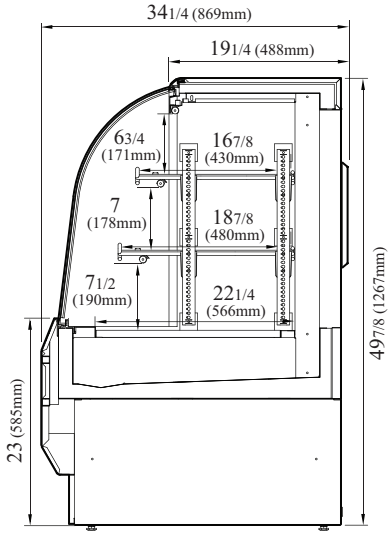


SIDE VIEW

## WARRANTY : 2 Year Parts and Labor Warranty
## Additional 3 Year Warranty on Compressor

## STANDARD FEATURES

- ***Self-contained system, no plumbing required***
- ***Solar powered digital thermometer***
- ***Digital electronic thermostat with defrost control***
- ***Bolt height adjustable up to 2-3/4"***
- ***White and black color come standard***

### *Recommended operating conditions*

TCGB models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product.

## OPTIONAL ACCESSORIES

- 1.6" caster: CAS16WBT00 (non-brake)
- 4" caster, ½" diameter & 13 TPI: 30265L0400 (non-brake), 30265L0300 (w/ brake)
- 6" leveling seismic leg (½", 13 TPI): 30221M0700

Ver.20240530

NATURAL Refrigerant

■ **Turbo Air**: 800-627-0032 ■ **Radiance**: 800-500-3519
■ **Warranty**: 800-381-7770 ■ **AC**: 888-900-1002

Continued product development may necessitate specification changes without notice.