REFRIGERATOR MANUFACTURER
Turbo air
more durable, efficient, beautiful

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Back Bars

Underbar Equipment
Super Deluxe Series

Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.

Model : TBB-2SBD-N6
TBB-2SGD-N



TBB-2SBD-N6



TBB-2SGD-N

FEATURES & BENEFITS

- ***Self-Cleaning Condenser***
  The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.
- ***Hydrocarbon refrigerants (R-290 / R-600a)***
  With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).
- ***Ergonomically designed doors***
  Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.
- ***Stainless steel countertop and interior***
  The exterior of the cabinet is constructed with heavy gauge reinforced stainless steel countertop and wear-resistant black vinyl coated galvanized steel. The interior is painted galvanized steel with reinforced stainless steel floor. Turbo Air Back Bar model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.
- ***Digital Temperature Controller***
  External digital temperature control has an easily accessible panel to quickly adjust temperatures, which includes a defrost control.
- ***Forced air cooling system***
  Fast cooling and balanced temperature throughout the cabinet.
- ***LED interior lighting***
- ***Double pane glass doors with Low-E glass (SGD Models)***
- ***High-density polyurethane insulation***
  The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.
- ***Adjustable, heavy duty, PE (polyethylene) coated wire shelves***
- ***Side mount compressor unit***
  With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front air intake feature also allows this model to be highly efficient in narrow spaces.
- ***Refrigerator holds 33°F ~ 38°F for the best in beverage preservation***

NATURAL Refrigerant · SPEC ISO 9001:2008 · Intertek · Intertek · 5 YEAR WARRANTY · Compressor 7 YEAR WARRANTY (U.S.A only) · ENERGY STAR® Qualified

Model	Swing Doors	CU./FT.	1/2 Barrels	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
TBB-2SBD-N6	2	19	2	6	1/5	1.7	298	58 3/4 x 27 1/4 x 37 1/8
TBB-2SGD-N	2	19	2	6	1/3	2.8	331	58 3/4 x 27 1/4 x 37 1/8

* Depth does not include 3/8" (SBD) / 1-1/2" (SGD) for door handles. Depth does not include 1-1/4" for rear spacers. † Height does not include 3-1/8" for caster height.

Model : TBB-2SBD-N6, TBB-2SGD-N

ELECTRICAL DATA		
Voltage		115/60/1
Plug Type		NEMA 5-15P
Full Load Amperes		1.7 (SBD) / 2.8 (SGD)
Compressor HP		1/5 (SBD) / 1/3 (SGD)
Refrigerant		R-600a (SBD) / R-290 (SGD)
Cord Length (ft.)		8.5
Lamp (W)		12.5
DIMENSIONAL DATA		
Capacity	cu. ft.	19
	1/2 Barrels	2
	12 oz Cans - 6 pack	85
	12 oz Bottles - 6 pack	70
Ext. Length Overall (in.)		58 3/4 (1494mm)
Ext. Depth Overall (in.)*		27 1/4 (692mm)
Ext. Height Overall (in.)†		37 1/8 (942mm)
# of Swing Doors		2
# of Shelves (# of Sub Shelves)		4 (2)
Shelf Size (L x D) (in.)		(L) 24 3/8 x 19 3/8, (R) 20 x 19 3/8
# of Casters		 6EA
Net Weight (lbs.)		276 (SBD) / 309 (SGD)
Gross Weight (lbs.)		298 (SBD) / 331 (SGD)

Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.
* Depth does not include 3/8" (SBD) / 1-1/2" (SGD) for door handles.
Depth does not include 1-1/4" for rear spacers.
† Height does not include 3-1/8" for caster height.

WARRANTY : 5 Year Parts and Labor Warranty
7 Year Compressor Warranty

STANDARD FEATURES

- ***Anti-corrosion coated evaporator***
- ***Self-contained system***
- ***2.5" dia. swivel casters with locks on the front set***
- ***Door locks***


OPTIONAL ACCESSORIES

- 1" caster, ½" diameter & 13 TPI: S28R813660 (non-brake)
- 2" caster for underbar series, ½" diameter: P0165B0100 (non-brake), P0165B0110 (w/ brake)
- 4" caster, ½" diameter & 13 TPI: 30265L0400 (non-brake), 30265L0300 (w/ brake)
- 5" caster, ½" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, ½" - 13 TPI x 1.54": LFM1213566
- 6" adjustable stainless steel leg: P0121P0100
- Additional PE coated wire shelf: 30278D1000 (Left), 30278D0900 (Right)


Ver.20240624

PLAN VIEW


(unit : inch)

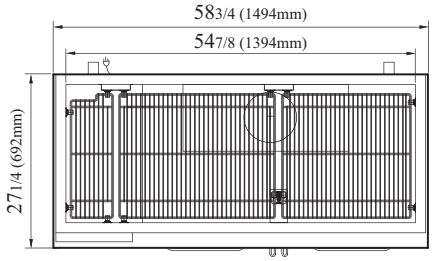


TOP VIEW

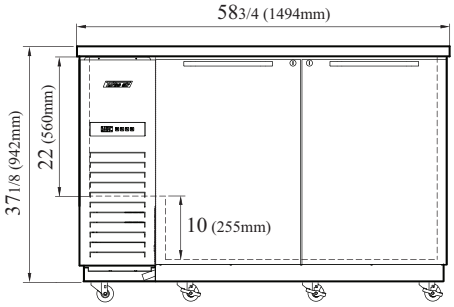

TBB-2SBD-N6 FRONT VIEW

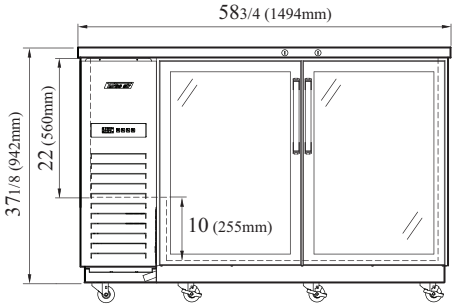

TBB-2SGD-N FRONT VIEW

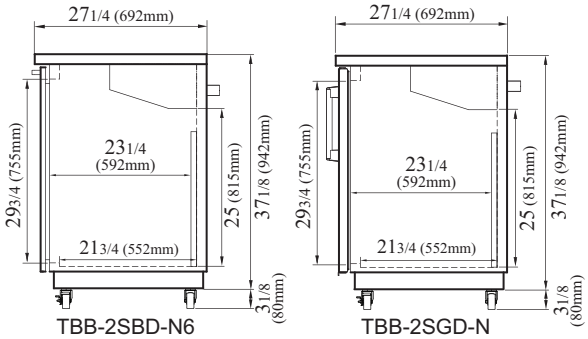

SIDE VIEW

NATURAL Refrigerant · ISO 9001:2008 · Intertek · Intertek · 5 YEAR WARRANTY · Compressor 7 YEAR WARRANTY (U.S.A only) · ENERGY STAR® Qualified

■ **Turbo Air**: 800-627-0032 ■ **Radiance**: 800-500-3519
■ **Warranty**: 800-381-7770 ■ **AC**: 888-900-1002