

DUKERS

Quality Commercial Refrigeration

2 YEARS PARTS & LABOR
PREMIUM
WARRANTY
5 YEAR COMPRESSOR

GLASS DOOR MERCHANDISER

DSM-68SR

3-Glass Sliding Door Refrigerator



TECHNICAL SPECIFICATIONS

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interior Finish	White
Exterior Finish	Black
Temperature Range °F	33 ~ 40°F
Compressor Power (HP)	1/2 +
Nema Config.	NEMA5-20P

PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Interior and canopy LED light with switch on the right side to always show your products at their best
- High quality coated stainless adjustable shelves prevent peel and rust.
- Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.

HIGH QUALITY & ROBUST DESIGN

DUKERS


Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com


DETAILS & SPECIFICATIONS

DSM-68SR

Front View

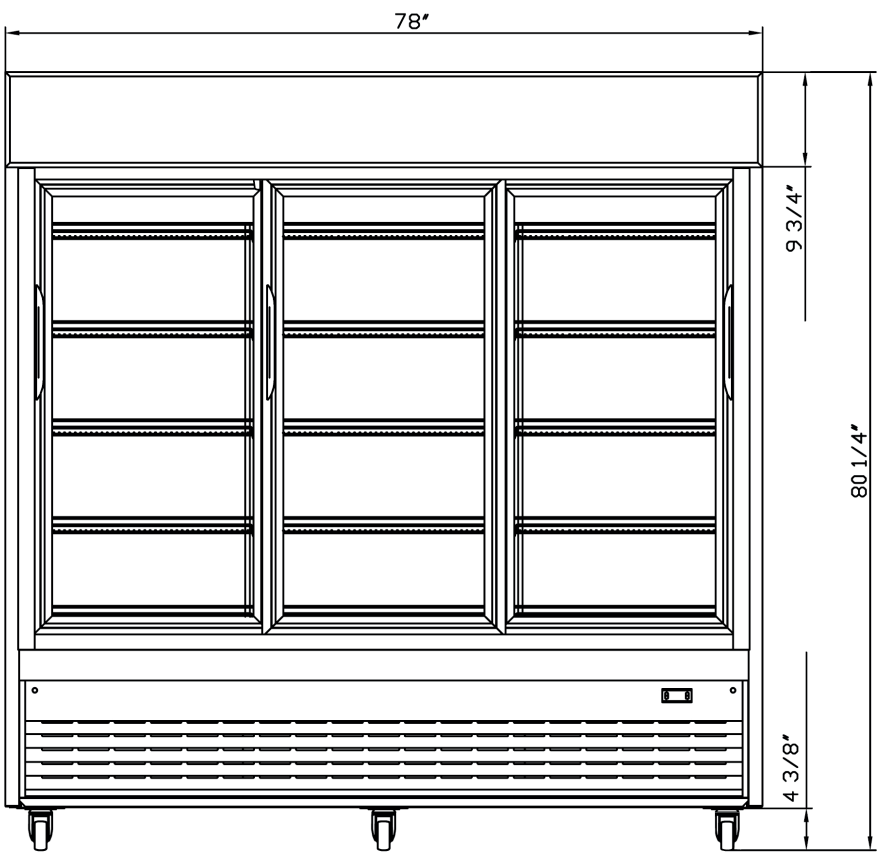

Side View

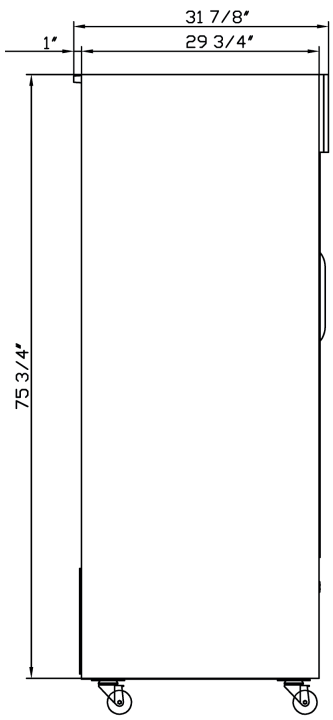

PROUD MEMBER CFESA Commercial Food Equipment Service Association

AQ AutoQuotes

NATURAL REFRIGERANT

Intertek

Intertek

NEMA-5-20P

MODEL DSM-68SR	
Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	823W
Total Current	7.40A
Total Capacity	69 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
DSM-68SR	78 x 31 7/8 x 80 1/4	80 x 32 7/8 x 82 1/4	528 lbs	15	14

DUKERS
Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com